

# SCIENTIFIC AMERICAN

[Entered at the Post Office of New York, N. Y., as Second Class Matter. Copyrighted, 1889, by Munn & Co.]

A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY, AND MANUFACTURES.

Vol. LXI.—No. 5.  
ESTABLISHED 1845.

NEW YORK, AUGUST 3, 1889.

\$3.00 A YEAR.  
WEEKLY.

## TELEMETER SYSTEM.

The uses to which the telemeter may be applied are so numerous and so varied as to render it impossible to describe them all in detail within the limits of a single newspaper article. Some of the more prominent uses to which this instrument is applied are the transmission to one or more distant points of the indications of thermometers, barometers, and pressure gauges; also for indicating at a distant point the height of water or oil in open or closed tanks, or the height of gas holders.

To accomplish the transmission of these indications two instruments are required, one for transmitting and the other for receiving and recording, the two instruments being connected by wires so as to form complete electrical circuits, which are supplied with a current from a suitable open circuit battery. A number of receiving instruments may be used in the same circuit.

The telemeter system has been in practical operation for a number of years, proving itself to be accurate and reliable in all of its applications. It has recently been much simplified and improved, both mechanically and electrically.

One of the uses to which the telemeter has been applied is that of transmitting time from a master clock to a series of dials. In this particular application its merits have been shown to the best advantage. As a

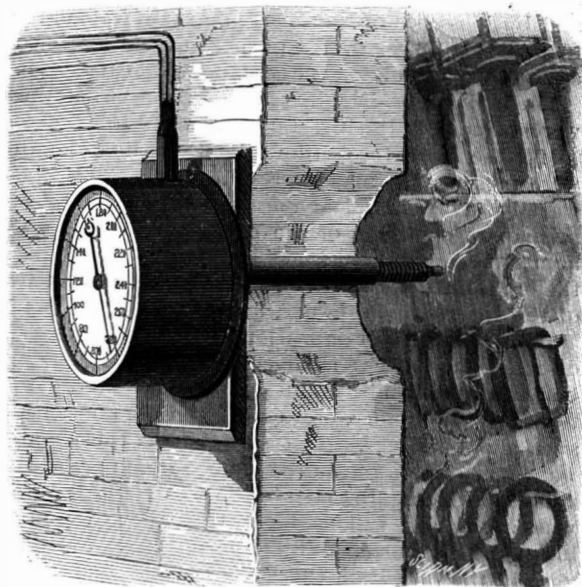


Fig. 6.—TELE-THERMOMETER.

time system, it has proved accurate and in every way desirable.

The transmitting instrument is substantially the same for all uses, and the receiving instrument is, in part, a copy of the transmitter, with the addition in some cases of apparatus for making a permanent record. The receiver is also provided with an alarm for giving notice when the prescribed maximum or minimum indication is reached. As indicated by the illustrations, the mechanism of the instrument is very simple and of such a character as to require no attention after being placed in position for use.

Without going minutely into detail, the operation of the apparatus may be briefly described as follows:

The transmitter has a step-by-step motion, which is provided with two magnets, one for turning the step-by-step motion in one direction and the other for turning it in the opposite direction. These magnets are in separate local circuits, each of which is provided with an auxiliary armature and contact closer, so that when the current is supplied to the magnet its armature will be attracted, and through the medium of the pallets and motor wheel will rotate the index arbor. The transmitting instrument with the dial removed is represented in Fig. 1.

The apparatus thus described appears on the front of the base plate beneath the glass of the case. The

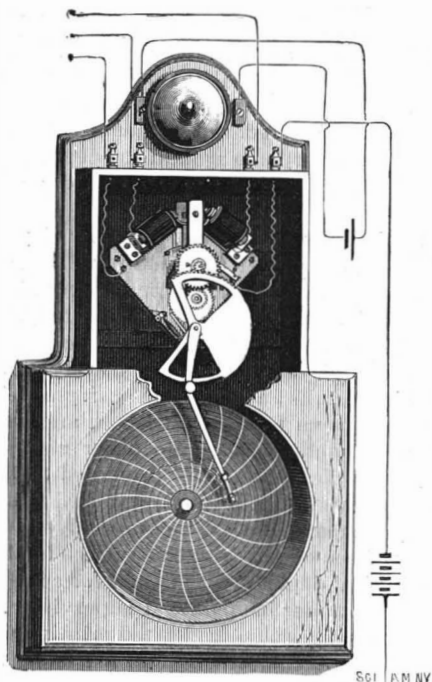


Fig. 2.—RECORDING RECEIVER.

complete mechanism is here shown, with its electrical connections. The thermometer, pressure gauge, or other primary instrument whose indications are required is placed back of the transmitting mechanism in such relation to the latter that the movements of its hand will close the circuit-controlling devices.

The receiver is provided with step-by-step mechanism like that of the transmitter, but the contact makers are omitted. Each magnet of the receiver is connected by a line wire with the circuit closer of the corresponding magnet of the transmitter, the latter acting as a relay for closing the circuit through the receiver, so that every impulse of either of the magnets of the transmitter is repeated by the corresponding magnet of the receiver, thus turning the index arbor of the receiver synchronously with the index arbor of the transmitter. By this action of either of the magnets of the receiver the circuit is broken and the mechanism of both transmitter and receiver is moved one step, and the instruments are both ready for a new impulse in either direction from the primary instrument.

When it is desired to preserve a record of the indications of the receiving instrument, a toothed sector is attached to a shaft journaled in the frame of the instrument and arranged to be engaged by a pinion on the index arbor. This toothed sector carries an

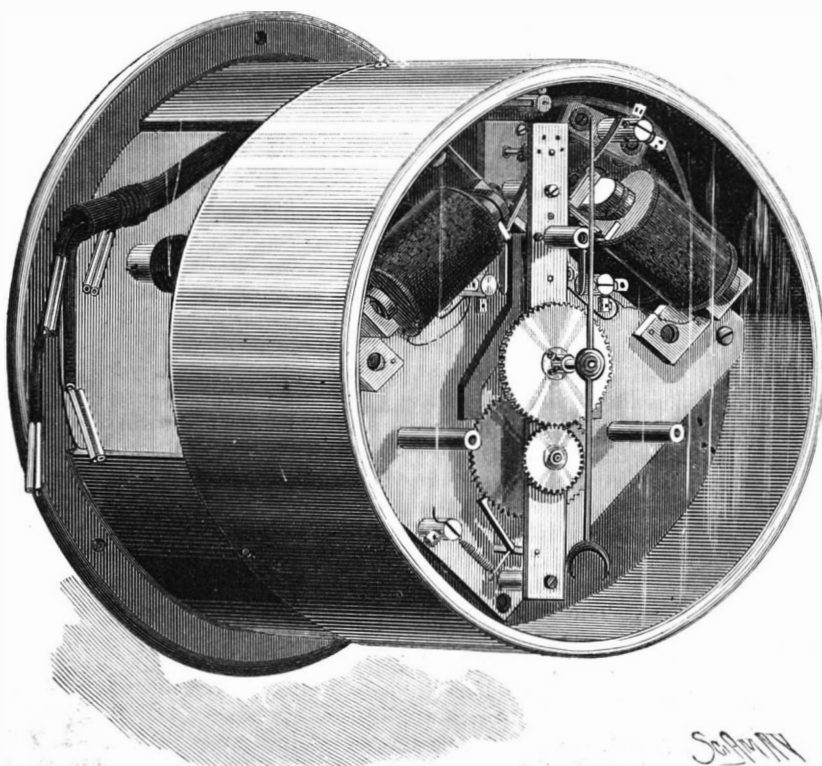


Fig. 1.—TELEMETER SYSTEM—THE TRANSMITTER.

arm provided at its free end with a pen which rests upon a graduated paper dial carried by a clock movement arranged in the lower part of the receiver case, as shown in Fig. 2. These graduated dials and the clocks to which they are attached are adapted to either daily or weekly records, as desired. A part of a day's record is shown in Fig. 3. The circuits are shown diagrammatically in Fig. 5.

These are described as follows:

*a*, hand carried by thermometer, and arranged to give the initial contact. *a'*, insulated spring-supported contact points. *a<sup>1</sup>*, wire connecting contact point, *a'*, to screw, 2, and magnet, *M<sup>2</sup>*. *a<sup>2</sup>*, wire connecting contact point, *a'*, to screw, 1, and magnet, *M<sup>1</sup>*. 1, 2, contact screws insulated from the base of the transmitter. 3, 4, contact springs fastened to initial armature. 5, 6, light armatures connected together, pivoted between the plates of the transmitter, and normally held in the central position, so as to bear on the faces of their respective magnets. 7, 8, insulated contact screws. 9, 10, contact springs fastened to the driving armatures and electrically connected to the base of the transmitter. 11, 12, armatures carried by the pallet lever for driving the machinery of the instrument. 13, circuit-breaking lever connected electrically with the plates of the instrument. 14, spring of the circuit breaker insulated from the base of the receiver and connected electrically to one pole of the battery, B.

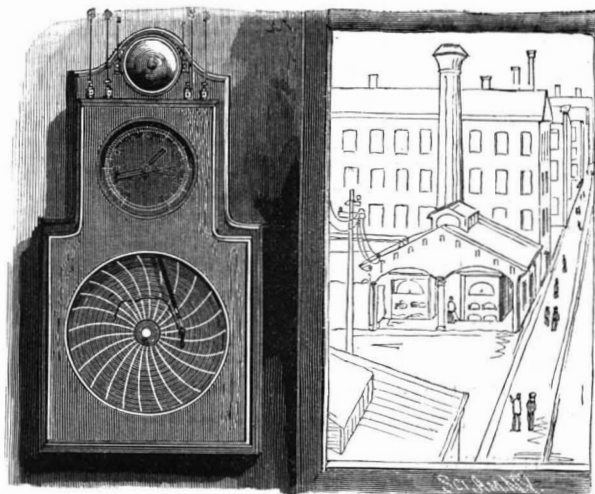


Fig. 7.—TELE-MANOMETER.

15, lever for holding the pallets in the central position. 16, pawl for holding the driving wheel, W, in its normal position. 17, 18, pins in the fork to act upon the incline of the lever, 15. W, driving wheel pivoted between the plates and used in all instruments. L<sup>1</sup>, line connecting magnets, M<sup>1</sup> and M<sup>2</sup>, of the transmitter to

the base of the receiver. L<sup>2</sup>, line connecting insulated part, 7, of transmitter with magnet No. 3 of the receiver. L<sup>3</sup>, line connecting insulated part 8 of transmitter with magnet No. 4 of the receiver. 4 B, line connecting the base of the transmitter with one pole of the battery, B. M<sup>1</sup>, M<sup>2</sup>, magnets of intermediate receiver connected to lines connected with corresponding magnets of the receivers. The operation of the apparatus is as follows: The hand, *a*, which is always in connection with the battery, moves and makes contact with the commutator point, *a'*, thus closing the circuit. The current passes through the line, 4 B, thermometer hand, *a*, commutator, *a'*, wire, *a'*, and magnet, M<sup>1</sup>, then from the transmitter through line, L<sup>1</sup>, to the base of the receiver; from thence through lever, 13, and spring, 14, to the battery. The light armature, 5, will be attracted by a feeble current, bringing the spring, 3, in contact with screw, 1, shunting the commutator, which will be moved away from its contact with the hand by the mechanism of the instrument. The armature, 11, being attracted by magnet, M<sup>1</sup>, brings the spring, 9, in contact with the screw, 7, dividing

(Continued on page 66.)

Scientific American.

ESTABLISHED 1845.

MUNN & CO., Editors and Proprietors.

PUBLISHED WEEKLY AT

No. 361 BROADWAY, NEW YORK.

O. D. MUNN.

A. E. BEACH.

TERMS FOR THE SCIENTIFIC AMERICAN.

One copy, one year, for the U. S. or Canada, \$3 00
One copy, six months, for the U. S. or Canada, 1 50
One copy, one year, to any foreign country belonging to Postal Union, 4 00

Australia and New Zealand.—Those who desire to receive the SCIENTIFIC AMERICAN, for a little over one year, may remit \$4 in current Colonial bank notes. Address

MUNN & CO., 361 Broadway, corner of Franklin Street, New York.

The Scientific American Supplement

is a distinct paper from the SCIENTIFIC AMERICAN. THE SUPPLEMENT is issued weekly. Every number contains 16 octavo pages, uniform in size with SCIENTIFIC AMERICAN. Terms of subscription for SUPPLEMENT, \$5.00 a year, for U. S. and Canada. \$6.00 a year to foreign countries belonging to the Postal Union. Single copies, 10 cents. Sold by all newsdealers throughout the country.

Combined Rates.—The SCIENTIFIC AMERICAN and SUPPLEMENT will be sent for one year, to any address in U. S. or Canada, on receipt of seven dollars.

The safest way to remit is by draft, postal order, express money order, or registered letter.

Australia and New Zealand.—The SCIENTIFIC AMERICAN and SUPPLEMENT will be sent for a little over one year on receipt of \$2 current Colonial bank notes. Address

MUNN & CO., 361 Broadway, corner of Franklin Street, New York.

NEW YORK, SATURDAY, AUGUST 3, 1889.

Contents.

(Illustrated articles are marked with an asterisk.)

Table listing various articles such as Appliances, railway, Books and publications, Business and personal, Carbonic acid gas, liquefied, etc.

TABLE OF CONTENTS OF SCIENTIFIC AMERICAN SUPPLEMENT No. 709.

For the Week Ending August 3, 1889.

Price 10 cents. For sale by all newsdealers.

Table listing sections I through X, including Astronomy, Biography, Civil Engineering, Electricity, Mathematics, Mechanical Engineering, Meteorology, Naval Engineering, and Photography.

WORKING FOR KNOWLEDGE.

James G. Blaine, Jr., son of the Secretary of State, is determined to become a practical railroad man, and is not afraid to do any sort of work necessary to acquire actual knowledge of the business.

The mercury was away up among the nineties when young Blaine made his first appearance on the engine. He was dressed in the ordinary coarse blue drilled overalls and jumper of a railroad fireman.

This reminds us of the early career of young Mr. Gilbert Jones, one of the proprietors of the New York Times. In order to become practically acquainted with the construction and operation of machinery, he enlisted several years ago as a workman in the Novelty Iron Works of this city.

THE NEW YORK WATER SUPPLY—HOW THE PEOPLE SUFFER FROM LACK OF PRESSURE.

The Croton gravity system of 1837 has in recent years lost the greater part of its hydraulic pressure in consequence of the extension of service mains.

The surface area made available, or which may be said to have been added to Manhattan Island, through the means of the elevator is one-third of the whole, or about 4,500 acres.

Accordingly, two features of importance in any scheme for an additional supply were to overcome the loss of head experienced from friction and to reach the lofty modern city with water under a head of at least 150 feet.

Now, to what extent are the people doing the work of the municipal government? And what expenses are incurred through lack of provision in the new project for plenty of water under adequate head?

In the first place, the property owners are pumping five-eighths of the delivery, or more than 62,000,000 gallons a day. To do this work, it is estimated, they have invested in pumps and machinery of various kinds about \$6,000,000, and they are under an expense for labor and fuel of \$15 per million gallons.

If the city had three pumping stations with stand pipes, this same volume of water could be raised 100 feet for eight dollars and a half per million gallons.

Again, the deficiency of pressure operates in a way to increase the expense of the Fire Department—the engines having to supply the force that has been absorbed in friction; for as the town expands both laterally and vertically, the pressure grows more feeble, and, in a degree proportional to the high buildings, less available.

Then, too, the actual loss of property by fire is greater than would be the case if there were sufficient head to permit prompt application of streams.

Another result is the refusal of insurance. So apparent is the inadequacy of the supply that \$150,000,000 worth of property in the city is now unprotected by policies.

In a large city there are besides many ways of utilizing small power, such as would be afforded by water under reasonable pressure, and various kinds of manufacture are better fostered by a quick and abundant flow than by a scant and intermittent one.

All these disadvantages of an ineffectual gravity supply combine to make New York an expensive place for property owners. So far as the question of pumping is concerned, the tendency will be to make it still more so, since improvement is more general on high than on low levels and since the new structures are invariably several stories higher than the ones they replace.

The fact that the new aqueduct has been built to withstand no pressure shows that the builders never dreamed of procuring water from an elevated watershed. So the most obvious sequel to this capacious conduit is a number of pumping stations; but in the contemplation of such a tempting local job as this would be, the people are confronted with the certain failure of the Croton watershed to afford the volume demanded and the danger of the quality of the water growing inferior when the storage reaches three times its present volume.

What the city will have to come to is an auxiliary supply from an elevated watershed. This is manifest destiny, and will shorten the road to imperial destiny.

The International Exposition of 1892 in the City of New York.

The year 1892 will be memorable as the four hundredth anniversary of the discovery of America by Christopher Columbus. To fittingly celebrate the birth of the new land and its introduction to civilization, it has been decided to hold an exposition.

The invitations, in spite of the absence of many who were included in the list, were responded to by enough to fill the room to overflowing. Some two hundred were present, the mayor presiding. The project was warmly received, and at once the mayor was elected permanent chairman of the committee, and Mr. William McM. Spear permanent secretary.

The question of organization of sub-committees was discussed, and after a sufficient deliberation, four such bodies were established, one on permanent organization, one on finance, one on legislation, and one on sites and buildings.

This marks the first step in the work of establishing what should and will be the greatest exhibition in the history of the world. While the meeting was in progress at the City Hall, the Chamber of Commerce of the city of New York held a separate meeting indorsing the project, and added the weight of their influence to the movement.

It is unnecessary to mention the names of the participants. It is sufficient to say that at both meetings commerce, official and political life, and the law were present in the persons of their leading members.

Nitrates in Rain Water.

One of the stations of observation selected by the authors is at Caracas (Venezuela), in 10° 3' N. lat., and at the elevation of 922 meters. The mean temperature is 21° 8', the rainfall is irregular, and the storms severe and frequent. The observations extend over two years, and refer to 121 samples. The general mean of nitric acid was 2.23 m.grms. per liter.

**Execution of Criminals by Electricity.**

A murderer in New York named Kemmler has been sentenced to death, and his execution will be the first under the newly enacted law by which electricity is substituted for the rope, hanging being abolished. The lawyers for the condemned man are making strenuous efforts to save the criminal on the alleged ground that the new mode of causing death is experimental, is a failure, is simply a device for inflicting grievous bodily torture, not a legitimate mode of execution, and therefore should not be applied or tried upon the body of their client.

A reference commission has been authorized by the courts to examine witnesses and take the testimony of experts as to the probable value of the electrical machines as instruments for destroying human life. Much evidence has been presented on behalf of the doomed man. Several experts have testified that the action of the proposed electrical current upon the human system was uncertain; that it might or might not kill; but in any case would produce the most excruciating pains. The expert witnesses for the State testify directly to the contrary. Among the latter Mr. Thomas A. Edison appeared. His evidence was clear and straightforward. The following is an abstract:

"What is your calling or profession?"

"Inventor," briefly replied the witness.

"Have you devoted a great deal of attention to the subject of electricity?"

"Yes."

"How long have you been engaged in the work of an inventor or electrician?"

"Twenty-six years." In reply to questions he said he was familiar with the various dynamos and their construction, and that they all generated either a continuous or an alternating current.

"A continuous current," he said, "is one that flows like water through a pipe. An alternating current is the same as if the same body of water was allowed to flow through the pipe in one direction for a given time and then its direction reversed for a given time."

The witness said he had been present when measurements were made in his laboratory to determine the resistance of human beings. Two hundred and fifty persons were measured, and their average resistance was 1,000 ohms, the highest being 1,800 ohms and the lowest 660.

"Will you describe the method of the application of your tests?" Mr. Poste asked.

"We took two battery jars about seven inches in diameter and ten inches high, and put in each jar a plate of copper. In the jar we put water with a 10 per cent solution of caustic potash. The parties we measured plunged their hands into the liquid so that the ends of their fingers touched the bottom of the jars. After waiting thirty seconds the measurement was taken. No one could go above eight volts."

"Where, in your opinion, is the major part of the resistance located?"

"I should say 15 per cent at the point of contact. The balance in the body."

"What is the law that governs the passage of an electric current, when several paths of varying resistance are offered to it?"

"It divides in proportion to the resistance encountered."

"Please explain the burning effects sometimes produced in the case of contact with an electric wire."

"It is due to bad contact and the difference in resistance between the wire and the flesh."

"In your judgment can an artificial electric current be generated and applied in such a manner as to produce death in human beings in every case?"

"Yes."

"Instantly?"

"Yes." He advised placing the culprit's hands in a jar of water diluted with caustic potash and connecting the electrodes therewith, and he said 1,000 volts of alternating current would surely produce painless death instantaneously. He did not think so small a continuous current would, although by mechanically intermitting the continuous current it could be made very deadly.

Mr. Cockran, attorney for the prisoner, in his cross-examination laid much stress upon Mr. Edison's views as to the resistance of human beings.

"Did you make the experiments on men which you have mentioned with a view to ascertaining just how to measure the resistance of Kemmler and find out how men may differ in the matter of resistance?" asked Mr. Cockran.

"I did. I made the experiments day before yesterday," Mr. Edison replied.

"And you found out there were different degrees of resistance in different men?"

"Yes; but that does not mean that the same current would not kill all the men."

"What would be the effect of the current on Kemmler in case the current was applied for five or six minutes? Would he not be carbonized?"

"No; he would be mummyized. All the water in his body would evaporate in five or six minutes."

With what he had found to be the average resistance

of the human body, the witness said that 1,000 volts would give a man an ampere of current, which is ten times as much as any man needs to kill him.

In reply to a question by the referee he said there was an alternating dynamo in London that generated a 10,000 volt current, and he considered it safe to double up dynamos to increase the current for use in executions.

"This is your belief, not from knowledge?" Mr. Cockran asked.

"From belief. I never killed anybody," the witness quietly replied.

**Visit of American Workingmen to Paris.**

On Wednesday, July 24, the American Workingmen's Expedition, sent by the Scripps League, set sail for Europe, to visit the Paris exposition and incidentally to inspect other features of interest in England as well as France. When the Centennial was in progress in this country, representative French workingmen visited it under the auspices of their government, and during the present year England has sent 100 men of this class to the Paris exposition. In order that America might not be behindhand, the Scripps League of American newspapers, including the *News* of Detroit, the *Press* of Cleveland, the *Post* of Cincinnati, the *Chronicle* of St. Louis, the *Echo* and the *Sunday News* of Detroit, organized this expedition. It includes some fifty representatives of many trades, among whom are four women. Their expenses are paid for them, and they are free each to study the progress of their own special technical art at the cost of the league. Thus they are at once a representation of American trades and a tribute to the progressive instincts and liberality of American journalists.

A very neat pamphlet has been issued *apropos* of their visit. It describes the origin of the affair, the programme, with brief biographical notes and portraits of the tourists. They are in many cases Knights of Labor or figure in trades unions and workingmen's associations. This gives a character to the party which it would lack were the participants present only in individual capacities. Without flattery it may be said that this body of trades people is in every way, by appearance as well as by record, well fitted to produce a favorable impression abroad, and to show how dignified are the positions to be attained by skilled manual workers in this country.

**Is Ice Water a Healthy Drink?**

In the opinion of the editor of the *Sanitary Volunteer*, the official organ of the New Hampshire board of health, there is a great deal of sentiment and many opinions regarding the use of ice water that vanish when the light of reason and experience is turned upon them. The fact is that ice water, drank slowly and in moderate quantities, constitutes a healthful and invigorating drink. There is no doubt that ice is a great sanitary agent, and every family ought to be provided with it during the warmer months of the year. It is true that the inordinate use of ice water, or its use under some special conditions and circumstances, is attended with great danger; so is the improper use of any other drink or food. The assumption that iced water is dangerous, and that iced tea, or iced coffee, or iced lemonade is a harmless substitute, is simply a delusion. As the source of danger feared by some is the degree of cold, we fail to see clearly how flavor modifies the effect of temperature. There are individuals, undoubtedly, who cannot drink ice water without injury, and who ought never to use it, but to a great majority of persons it is refreshing and healthful. Its use, temperate and discreet, is in no way to be condemned, which cannot be said of some of its substitutes.—*The Sanitary News*.

**How to Lay Floors.**

After the joist has been jointed with the fore plane or jointer and spaced on the wall, then place stay lath near where the bridging should be. One man should sight the joist straight while another man nails the stay lath down (temporary, of course). The joist should be beveled up with straight edge at wall bearings. Now when the building is ready for floors we will cut one course of boards the length of building, then strike a line on the joist to straighten the first course by next laying the boards to the line, and with the *groove* edge to the wall, and nail down on groove edge through board, also nail over the *tongue* at an angle of 65°. If there are any irregularities in the wall, support the starting course with some shingles where it is away from the wall, and after the floor is complete they can be taken out. Proceed with next course, drive up the board with a piece of hard wood laid against the tongue so as not to mar it, and nail over the tongue only as before. Continue so within six or eight inches of bridging line, then bridge the joist, take off stay lath, and proceed with flooring as before. By laying floor up to the bridging line brings all joists up even, if there should be any slight unevenness in them, and the bridging then holds them rigid.—*A. Chip*.

**The Morphia Fiend.**

Under this very suggestive heading, a writer in the *Pull Mall Gazette* gives us a very graphic description of the morphia habit, which is apparently growing among the community at an alarming rate, and causing devastation to body and soul in a degree which can only be estimated and realized by those who have the misfortune to witness its effects upon the unfortunate creatures addicted to its use.

Imagine (says the writer) an instrument about the size of a pencil case, constructed somewhat after the model of a wasp's sting, and fitting into a tiny case which will go with ease in the muff, the waistcoat pocket, or the bosom of the dress. The instrument itself may be of gold, and the case may be fashioned like a jeweled scent bottle or other trinket, and hang suspended from a golden chatelaine with the most innocuous air. This is the injector, and a slight puncturation of the skin with the waspish point is sufficient to enable the required quantity of the magic liquid to be discharged into the system. Nor is the term magic an exaggeration, for not more magical was the effect produced by the pills which the travelers swallowed in the cave of Monte Cristo than that which results from the injection of morphia. It must be, however, observed here that there are three distinct stages of morphia absorption, all of them brief in duration, the last one briefest of all.

During the first stage the results are purely pleasurable, they bring a draught of fresh life into jaded limbs. The faculties receive a sudden stimulus, the callous sense of pleasure is sensitive once more, the vision of the world cast on the mental eye is drawn in rosy lines, the whole appreciation of things earthly is that of one who is prepared to drain the cup of life to the bottom and enjoy it to the full. The subject lives in a glamorous sense of vague happiness, her half-closed eyes reveal the state of exquisite lassitude which laps her limbs, she feels that her one enemy is exertion, she is too happy to trouble about anything, all that she asks is that her friends should be happy around her, even as she is happy. Her hold on eternity loosens as her desire for it decreases. "Why take thought for the morrow?" would run her new reading of the text, "Sufficient for the day is the happiness thereof."

In time, however, a change comes o'er the spirit of this rose-colored dream. Its continuity becomes broken by dreadful intervals of reaction, during which the victim is oppressed by all the horrors of intense melancholy and weakness, and from which relief can only be obtained by continual repetition of the process of injection. The baneful habit acquires a firmer hold by counter-irritations. It is so easy to drive away the blue devils that are making themselves apparent, to check the reaction which has begun to set in, to change the dark shadows which are clouding over the vision of life into the rainbow hues of the morning, to transform the victim of melancholy, the prospective suicide, into the laughing child of pleasure whose creed is that of the half-pagan Leo X., "Let us enjoy what God has given us." So easy—but only by constant use of the fatal drug; and as the former slight injections have lost their power, larger doses of the stimulant must be launched into the system before the desired effect can be produced.

The result, however, of the increase of the quantity injected is to develop the feeling of lassitude until in time—such a brief period!—it completely overpowers the senses, and the victim becomes practically lost to the world. She lives in a rose-colored world of her own, in which happiness reigns supreme and which she would not leave if she could; for her re-entry into the life she has forsaken can only be accomplished by passing through a period of intense mental and bodily torture. She knows that she is slowly dying, that she is slipping to extinction in a soulless, mechanical way, like a clock which inevitably runs down when its motive power is exhausted; but her appreciation of abstract ideas has become blurred; life has lost its meaning, death its terrors. Better it is, she thinks, so far as she compares her condition at all, to fade slowly and happily out of life without a thought or a care to check the last brief period of existence than to face the struggle by which alone she could be saved. Indeed, it is doubtful whether, even if she could be kept by force from the use of the stimulant, she would not feel its loss so acutely that she would die in horrible agonies almost as quickly.

By a curious perversion, therefore, of the original object, it has been reserved for modern science to bring into existence and use the dream of the ancient poets—the drug which conferred happiness unchecked and unalloyed. Were it possible, however, to analyze the mental condition of the victim during the hours of reaction, it might be possible to realize also the tortures of the damned in the mediæval hell.

THE Supreme Court has repeatedly said that a man's right under his patent for an invention is as absolute as under a patent for lands, and no one would say that one should lose the right to his house because some one else saw fit to take possession of it against his will.

TELEMETER SYSTEM.

(Continued from first page.)

the current which passes through the line,  $J^2$ , magnets,  $M^6$ , of the intermediate magnet,  $M^8$ , of the receiver to the base of both instruments; through the lever, 13, and spring, 14, to the battery. The armature of the magnet,  $M^8$ , is attracted, carrying the fork or pallets which propel the wheel,  $W$ , and also by means of the pin, 18, pushes lever, 15, so that it strikes the ad-

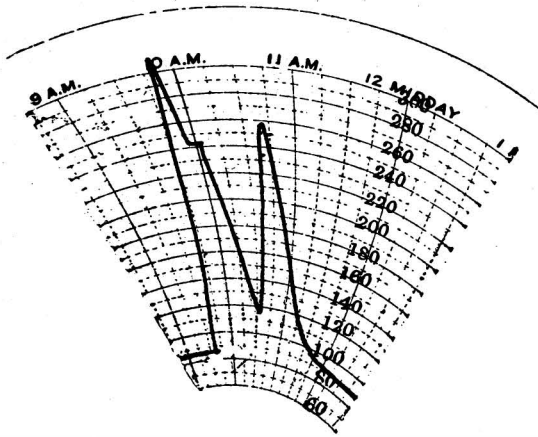


Fig. 3.—PART OF A DAY'S RECORD.

justable screw in the lever, 13, throwing it away from its contact with spring, 14, breaking the circuit and allowing the instruments to return to their normal position.

In Fig. 6 is shown the application of the tele-thermometer to a japanning oven. The thermometer spiral extends into the oven, and its shaft passes through a tube to a transmitting instrument attached to the outer surface of the oven wall. This tele-thermometer with ordinary pipe fittings can be attached to any boiler tank or pipe to show the temperature of the liquid, gas, or steam contained therein. Wires leading out of the top of the instrument extend to a receiver at a distant station.

In Fig. 7 is shown one of the important applications of the telemeter. The transmitting steam gauge upon the boiler in the distant boiler house sends its indications through the wires to the receiving instrument, where it indicates the boiler pressure and also makes a continuous and accurate record, the receiver being removed to a safe distance from the boiler house, where the records will be out of danger of destruction by an explosion, should one occur. It will be noticed that in this, as in the other receiving instruments, an alarm bell is shown which is set in operation by an extreme movement of the index in one direction or the other.

A similar application of the telemeter is shown in Fig. 8. In this case the transmitting instrument is connected with a gas holder, and the indications of the height of the gas holder are transmitted to the receiver at the distant station. Here, also, a record is made from which at any time the cubical contents of the holder may be determined.

In Fig. 9 is shown a tele-thermometer located in a mine, the receiver being above ground; and in Fig. 10 is represented a water level indicator capable of giving the height of the water in reservoirs, dams, and streams, and showing the rise and fall of tides at distant points. This application of the telemeter will be readily understood from the illustrations.

It is obvious that there are various other uses to which these instruments may be applied. For instance, they will prove of great value in connection with

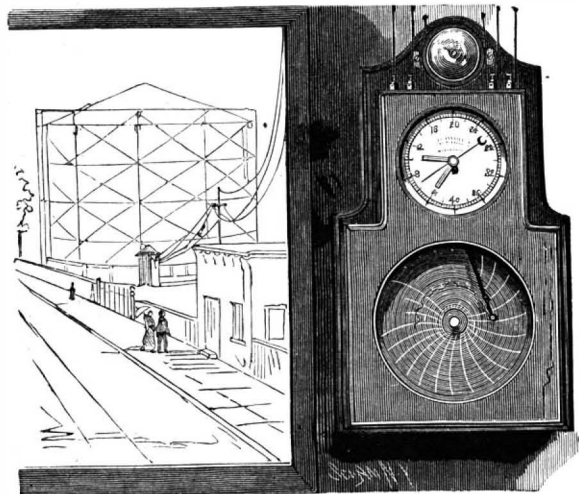


Fig. 8.—TELEMETER APPLIED TO GAS HOLDER.

meteorological instruments, transmitting dynamometers, speed indicators, etc. They may also be utilized to advantage for indicating the height of water or oil in boilers or tanks under pressure. They may also be employed as deep-sea thermometers and for indicating the temperature of the sea in the track of sea-

going vessels, keeping a record of the temperature during their voyage.

These instruments are manufactured by the Standard Thermometer Company, of Peabody, Mass.

The Use of Dogs in War and in the Army.

A recent paper read before the Royal United Service Institution of England was devoted to a subject which to a certain extent is a novel one, the employment of dogs for military purposes. While it is by no means difficult to cite instances from history of the utility of dogs in the service of individual masters, in the averting of surprises, etc., in similar emergencies, yet the systematic enrollment of the animal in the ranks of a modern army is to a great extent a novelty. The dog possesses qualities which, if properly directed, would give him much utility. His speed, small size, tendency to recognize a master, and capability of distinguishing between a friend and foe, are among these qualities.

As a sentry he could be employed to supplement the human soldier. The author of the paper we have alluded to considers that with a dog to help them, sentries need not be posted within 300 yards of each other. The scent and acute powers of hearing of the dog, he considers, would cover efficiently such an interval. The role of sentry is an old one for the dog, as he figures as such in country houses everywhere. Turning from so obvious a use, his scouting powers may be found available.


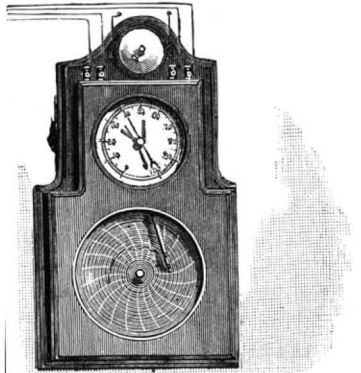


Fig. 9.—TELE-THERMOMETER—A MINE.

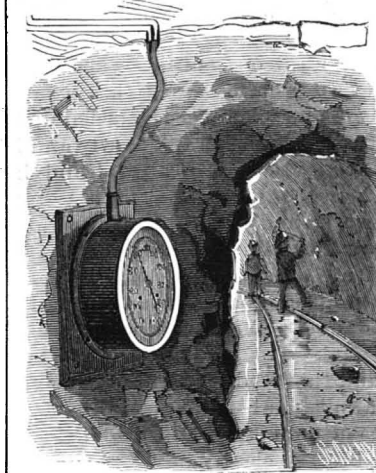

When a message or urgent dispatch was to be forwarded, the canine messenger could often be utilized. His speed and comparatively small size would render him a more difficult object to hit than the mounted soldier. The rapidity of conveyance of the dispatch would be important. A dog has run 2 kilometers, nearly 1 1/4 miles, in 2 minutes and 45 seconds, on an ordinary road. This exceeds any available means of transportation except a very good horse or steam. The ordinary trooper could not ride it at anything like that speed.

Among the other services that of ammunition carrier has been suggested. The trouble in this case would be that the load would be light. It is at least one additional service. A reference to the record of the St. Bernard dog suggests the utility of the animal in such service as that of the Red Cross Society. He could be made to scour the battlefield after an engagement, rendering assistance in the discovery of the wounded and directing the relief parties to those needing their service. Many wounded soldiers lying on the outskirts of the field in isolated places might thus be found.

The subject has long attracted the attention of military men. The French and Germans have, it is said, many dogs in training. On the Belgian frontiers the smugglers have used them for years to transport dutiable goods, and the custom house officers have their own corps of dogs to counteract the smugglers' operations. They have, however, not yet been fully enlisted in the military service. It is not impossible that they may yet play an important part in war operations. The bicycle adds to the speed of a soldier where the

ground is such that it can be employed. But the dog is to a great extent independent of the nature of the ground, and can make rapid progress over fields and through forests where horse or bicycle would be seriously delayed.

New Labor Laws in New York.

A new law provides that the salary of laborers employed by the State or any officers of the State shall not be less than \$2 a day or 25 cents an hour. In all cases where laborers are employed on any public work

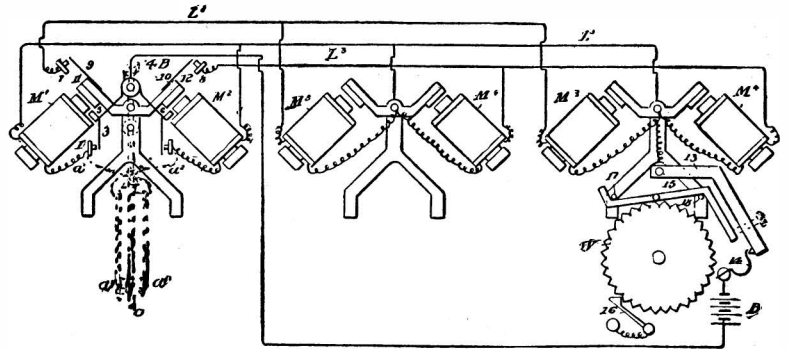


Fig. 5.—DIAGRAM OF CIRCUITS.

in this State, preference shall be given to citizens of New York State. Several other so-called labor bills of importance became laws. One provides that every union or association of working men or women adopting a label, mark, name, brand, or device intended to designate the products of the labor of members of such union or association shall, in order to obtain the benefits of the act, file duplicate copies of such label, name, mark, brand, or device in the office of the Secretary of State, who shall under his hand and seal deliver to the party filing or registering the same a certified copy and a certificate of the filing thereof, for which he shall receive a fee of \$1. Another amends the revised statutes so as to extend the exemption of household furniture and working tools over districts from warrant and sale under execution. A third law exacts that all corporations shall pay the salaries due their employes each week up to within six days of the date of payment, and also that it shall not be lawful to pay their employes in their own scrip, commonly known as "store orders." The penalty for such offense shall be not more than \$50 nor less than \$10. The complaint must be made within thirty days.

Liquefied Carbonic Acid Gas.

M. Gall has recently devised another method of preparing carbonic acid gas, which, in its liquefied and solid states, is now pretty largely used. The gas is obtained by burning coke, about 18 per cent of the products of combustion being this gas. Any sulphuric acid is eliminated by washing, and the whole is then passed through a solution of carbonate of sodium or potassium. The nitrogen and any oxygen there may be in the gases pass through the solution unchanged and are allowed to escape into the air. The carbonic acid, however, is retained in the solution, changing the mono into a bicarbonate. This solution is afterward transferred to a boiler, where the bicarbonate is again reduced to the monocarbonate, the gas driven off is collected in a suitable receiver connected with the suction pipe of the compressing pump, while the

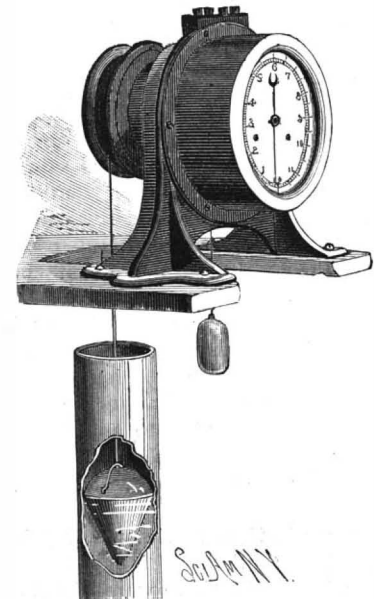



Fig. 10.—TELE-HYDROBAROMETER.

sodium carbonate is used over again to fix another supply of the gas. The compression of the gas is carried out in three cylinders, in the first of which it is raised to a pressure of 73.5 lb. per square inch, in the second to 367 lb., and in the third to 883 lb. per square inch, under which pressure it liquefies.

**AN IMPROVED BALING PRESS.**

A portable hand baling press, designed for use in the baling of cotton, wool, broom corn, hay, etc., is illustrated herewith, and has been patented by Mr. Willard E. Walter, of Silver City, Idaho Ter. It is a box-like structure mounted on a bed frame of sills united by heavy bolts, the side and end walls also being connected by bolts. To each of the side and end walls are also hinged doors. The end walls are slotted to provide for the passage of a double truss upon which is mounted a follower, and between the ends of the sections of the truss are threaded shafts carrying double ratchet nuts that bear against wear sleeves extending upward between the sections. The lower ends of these threaded shafts are held by the bed plates, while brackets support their upper ends, to each of which is hinged a threaded rod passing up between the end sections of an upper double truss connected to the press head, the ends of the rods having hand wheels and binding nuts.

The double ratchets on each end of the press are provided with lever heads pivotally connected with lever arms. To fill the baling chamber, the side doors and press head are thrown open, and the ratchet nuts at the ends turned down, when the follower may be lowered nearly to the bottom of the structure. When the press is filled with the material to be compressed, the press head, threaded rods, and side doors are moved to the position shown in the engraving, the lever heads

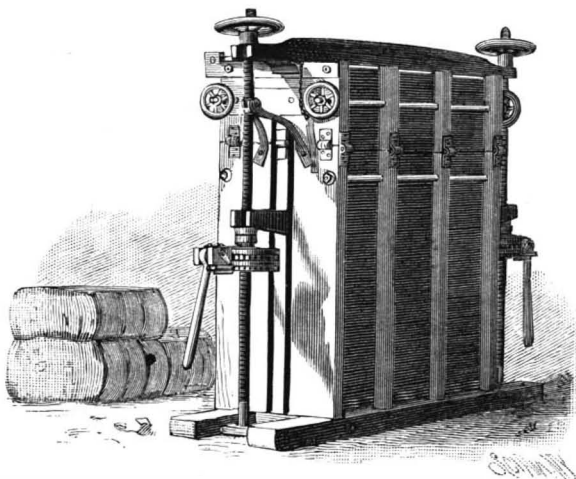


WALTER'S BALING PRESS.

being applied to the ratchet nuts and the end levers operated to force the follower upward till the material is sufficiently compressed, when the binding wires or cords are fastened in place.

**AN IMPROVED CULTIVATOR.**

The accompanying illustration represents a combined cultivator and harrow, for the general preparation of land before planting, and for use afterward in the general cultivation of all kinds of crops. It has been patented by Mr. James Shoobred, of Eastover, S. C. Fig. 1 shows the implement as a smoothing harrow, presenting an angle tooth at an angle of 45°, with flanged feet, to ride roots, rocks, etc., and cut through sod without dragging. Two or more can be connected to a pole and used as a smoothing harrow, and then as separate cultivators, the center tooth being adapted to any attachment. In Fig. 3 the harrow is shown as a scarifier, with teeth at right angles and flanges at 45°, for cutting through old sods or for deep tillage, the pivoted draught beam being thrown to one side to show its capacity. Fig. 2 shows the implement as a grass rake or wire grass extractor, the teeth being thrown forward, while Fig. 4 shows it as a cultivator, which, by removing the center tooth, cultivates both sides of a row at once. In Fig. 5 the harrow is represented as a cultivator for an entire alley, adaptable to any width of row, the pivoting of the draught beam allowing it to be thrown at any

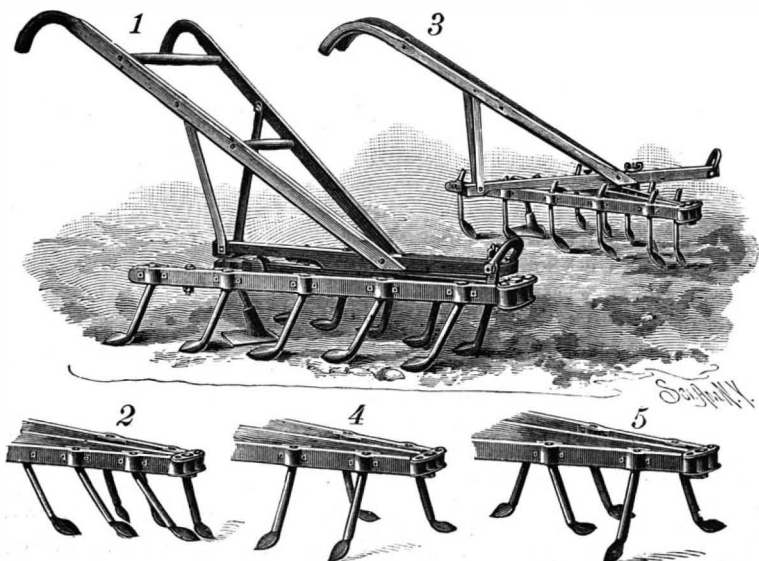

SHOOLBRED'S CULTIVATOR.

angle or position to the line of draught, whereby the frame may be drawn along longitudinally to the line of the draught beam, or at right angles thereto, or at any intermediate angle, for the purpose of securing a different action of the teeth. The frame for supporting the teeth is composed of a central beam and pivoted wings, the teeth having cutting lower portions and angular shanks, whereby the teeth may be adjusted to change their action upon the land. The teeth are changeable to eight separate distinct positions, affording opportunity for an indefinite number of combinations.

**AN IMPROVED SEED PLANTER AND FERTILIZER DISTRIBUTER.**

A planter designed to drop the seed and fertilizer in holes any desired distance apart, adapted to drop two different kinds of seeds if desired, and in which the dropping device may be operated either automatically or by hand, is represented in the accompanying illustration, and forms the subject of two patents issued to Mr. Whitman A. Holt, of Harrison, Me. A plow is held in the front end of the frame of the device, the driving wheel being in the rear, while a fertilizer hopper is held to turn on the frame by the rotation of the driving wheel, and a seed box is held stationary on the frame at the rear of the fertilizer hopper. A drop plate is held on the fertilizer hopper and operates under the seed box, a seat with apertures being secured on the main frame under the drop plate and fertilizer hopper, fixed arms held in the fertilizer hopper covering up alternately the discharge openings in the bottom of the hopper. Combined with the hopper is the seed box, secured on the apertured fixed seat, the drop plate held on the hopper projecting under the slotted bottom of the seed box, which is divided by a partition into two compartments, and rods connecting it with the hopper, cam wheels operating the rods, and these cam wheels being actuated by the main driving wheel. A rod connected with one side of the hopper is pivotally connected with a lever for turning the hopper by hand. On the main plow is pivoted a mould board, and covering shovels are pivotally connected with the mould board at its end, with means for connecting the rear ends of the shovels with each other.


**The Society for the Preservation of Ancient Egyptian Monuments.**

Egyptian archæology has unquestionably placed a plentiful supply of materials at the service of modern painters and writers of historical romances, enabling them to impart a charm of realism into their respective presentations of the life, arts, and customs of the Egyptians from the misty ages of Mena to the gorgeous periods of Cleopatra or to the times of Diocletian's implacable persecutions. Still, it cannot be said that the science of Egyptian archæology is complete and to be developed no further. Unworked veins of information exist in the remains of palaces, tombs, and temples erected in past times by a Thotmes, a Rameses, or a Ptolemy along the banks of the Nile. For the purposes of completing natural history, vestiges of extinct evolutions or creations are eagerly rescued and carefully preserved for successive investigators. The performance of a similar duty is surely due to Egyptian archæology. The sense, however, of such an obligation has not acquired strength enough to provide the necessary protection *in situ* of the monumental relics of ancient Egypt, and the consequence is that their gradual destruction has been reduced to a system through the combined operations of natural causes and of predatory Arabs, tourists, and curiosity mongers.

To endeavor to arrest the progress of such irreparable mischief the above named society has been recently formed. Sir Henry Layard, Mr. Flinders Petrie, Lord Wemyss, Sir William Gregory, Sir Frederick Leighton, Mr. Le Page Renouf, Lord Wharnclyffe, Lord Carlisle, Sir Colin Scott-Moncrieff, and General Brackenbury are leading members of its executive committee. Mr. E. J. Poynter, R.A., is honorable secretary, and Mr. Bertram Currie is honorable treasurer.

Both Lord Salisbury and the Egyptian government have warmly testified their appreciation of the intentions of the society. The Egyptian government, indeed, have taken the important step of causing a careful survey to be made of those ruined temples and palaces which suffer more severely than others from perennial infiltrations of the Nile and from the destructiveness of human agencies. A full report has been drawn up by a French engineer, Grand Bey, and the estimated cost of propping masonry in imminent danger of falling, of draining and clearing various sites, and of fencing round groups of ruins, from Philæ to Abydos, is

£8,500. The society proposes to raise this sum by public subscriptions, and to place it with the least possible delay at the disposal of the Egyptian government, who will thus be enabled to at once rescue the remains of some twenty most important monuments, such as the temples at Esneh, Luxor, and Karnak. The Egyptian government has given a further earnest of its desire to

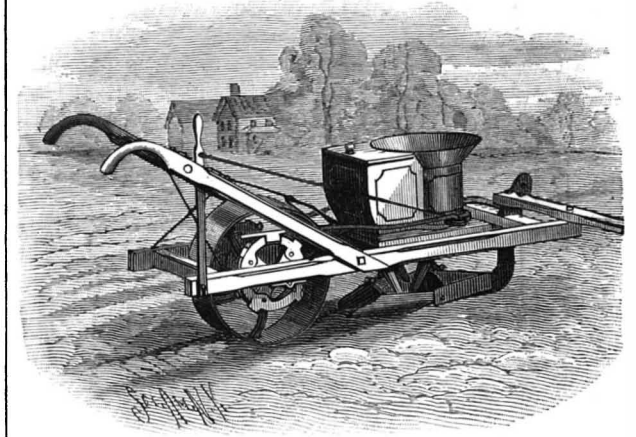


HOLT'S SEED PLANTER AND FERTILIZER DISTRIBUTER.

do its utmost in the matter by undertaking to provide proper inspection and guardianship of the ruins in future.

**AN IMPROVED CULTIVATOR.**

The accompanying illustration represents a construction styled by the inventor the "Texas Perfection Cultivator," which is designed to be adjusted laterally to any width and vertically to any desired height. It is a patented invention of Mr. John C. Benthall, of Schulenburg, Texas. The front cross bar consists of two spaced beams, near each end of which are metal boxes having each a vertical groove in which a tube is perpendicularly held by an eyebolt provided with a lock nut, so that the position of the tubes with respect to the length of the beams may be readily changed as desired by sliding the blocks toward or away from the center. Supported at their forward ends by rods carried upward through these tubes are two spaced longitudinal beams, these beams carrying, at the rear of the axle, on their inner and outer faces, vertically adjustable tubes, through each of which is passed the rod or standard of a share carrier, the lower end of which is curved, the blades being such as are

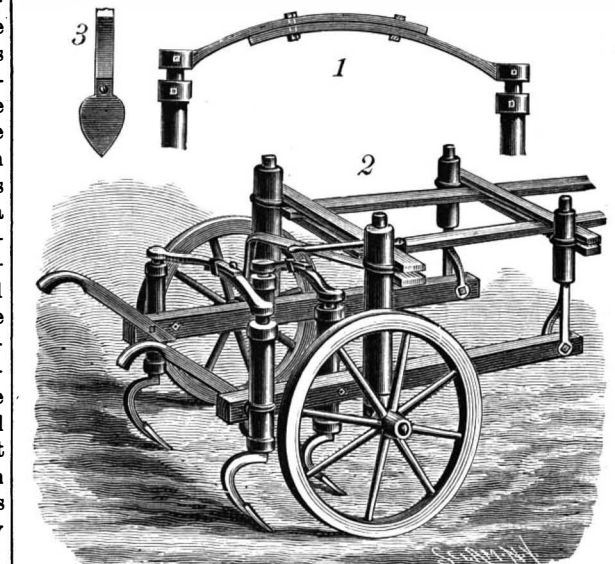

BENTHALL'S CULTIVATOR.

usually employed in cultivators, as shown in Fig. 3. The top of each standard is provided with an arched or curved iron by which the two opposing standards are adjustably connected, as shown in Fig. 1, one iron overlapping the other to form an arch, and each iron having a registering slot and bolts by which the two members are clamped together. The axle is arched, and consists of two transverse beams, on the rear face of which are adjustable boxes, each carrying a vertical tube in which the vertical member of an angled spindle is inserted, upon the horizontal member of which the drive wheels are loosely mounted. By this construction the distance apart of the drive wheels may be readily arranged to accommodate the adjustments of the machine, and in working crops of considerable height the axle arch may be conveniently raised as desired. When the machine is used as a walking cultivator, it is guided by carrying the handles either to the right or left; and when employed as a riding cultivator, a lever is employed which is fulcrumed upon the axle arch near one end and connected by a link and rod with the opposite longitudinal beam.

**If not already a subscriber, send 25 cents and have a copy of the Architects and Builders Edition of the "Scientific American" mailed to you. After seeing a copy you will want all the back numbers.**

[SPECIAL CORRESPONDENCE OF THE SCIENTIFIC AMERICAN.]

THE PARIS EXHIBITION.

THE LOCOMOTIVE EXHIBITS—THE ITALIAN SECTION.  
PARIS, July 4.

There are three Italian locomotives here, all differing in their details of construction, while each detail has its counterpart in some one or other of the French or Belgian exhibits, and is, in the main, distinct from American or English practice. Beginning with one over which hangs the signboard *Strade Ferrate Meridionali Bele Adriatica Italia*, it is a four-wheel coupled engine, has outside cylinders, say 20" x 26", and a single guide bar, which is the only feature about it copied from American practice.

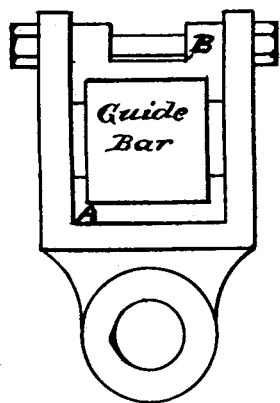


Fig. 1.—CROSSHEAD OF AN ITALIAN LOCOMOTIVE.

The construction of the crosshead is shown in Fig. 1, in which the pieces represented by A and B are of brass, while the rest is of wrought iron. A feature on this engine that requires attention (because I find it on several other engines, both English, French, and Belgian) is that the end of the piston rod is enlarged to form the cone that goes into the crosshead. This necessitates that there be a bush or sleeve fitting into the gland and being put in in two halves, a construction for which I see no necessity. The only object there can be is to strengthen the rod cross section through the keyway; but piston rods do not break there if of good material and if the taper of the rod end is correct, because, if there is not too much taper and the cones are well fitted, the friction of the surfaces will almost hold them together; but if there is too much taper on the cones, the friction is diminished, more strain falls on the key and the metal on the sides of the keyway, and breakage is likely to follow. The connecting rod end of the engine is shown in Fig. 2, in which the usual order of things is reversed,

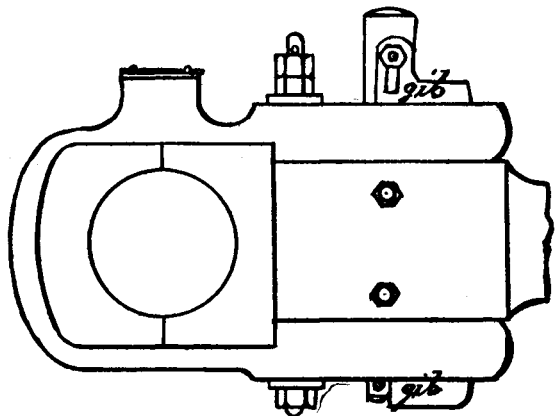


Fig. 2.—CONNECTING-ROD END—ITALIAN LOCOMOTIVE.

since the bolt is put between the key and the brasses, necessitating that the bolt be slackened back each time the key is used, to adjust the brasses.

Again, in order to let the strap pass up the rod as the key is driven in, the bolt hole must be slotted either in the connecting steel end or in the strap. Hence the holding power of the bolt is confined to that of the nut, there being no grip of the circumferential surface of the bolt, as there is with a taper bolt filling and driven into its hole. We may now consider the key and gib arrangement, and it will be perceived that the gib extends upward to provide a slot to receive a pin projecting from the key, the nut on this bolt locking the key to the gib, which is a very expensive form of construction. In addition to this, however, there are the two set screws also holding the key and a pin at the bottom, so that, taken as a whole, we have a complicated as well as an unhandy design, without any compensating advantages. The oil cup of this rod requires also attention, since it represents a construction found on many engines here. The interior construction is, I am informed, simply a siphon, such as shown in my

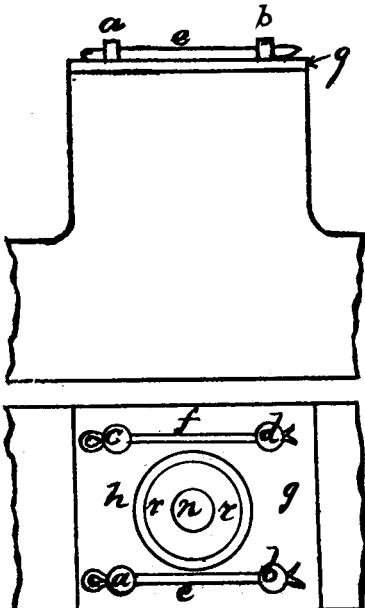


Fig. 3.—OIL CUP USED ON ITALIAN AND FRENCH ENGINES.

previous article on the locomotives here. Side and plan views are given in Fig. 3, in which *a, b, c, d* are four pins or studs, through which pass the long split pins, *e, f*, which hold down the cap or cover, *g*. At *h* is a circular projection forming a dish, *r r*, in the center of which is a button or disk held up by a spring, so that to put oil in the cup this button must be depressed. The object is, of course, so far as the button is concerned, to exclude the dust; but the whole design is very expensive and with no compensating advantages.

The old form of oil cup, when forged solid on the rod,

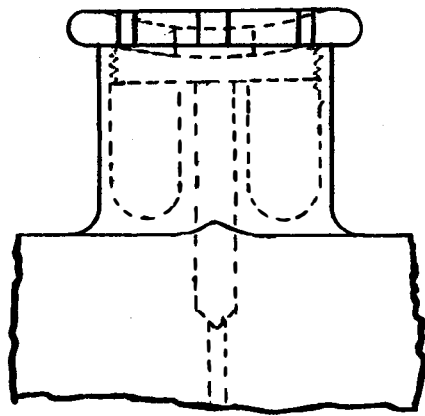


Fig. 4.—SOLID OIL CUPS.

is as in Fig. 4, the objection to it being that it required turning inside and out, and to save some of this work English builders let the outside be square instead of round, which was easily done with the rest of the strap when on the planing and slotting machine, and involved no extra chuckings. The English, however, use a round cap that screws into the square cup, and in place of the threads the Italians and French put on a square cap with four pins and two split pins, which is more expensive and no better, since a cork or plug screwed into the oil hole of the round cap is just as good as the spring button of the square cup. There are no locomotives here with the American form of sight lubricators, nor with oil cups that screw in or are fastened on to the straps, except the solid grease feeder shown in my last letter.

Another form of rod end is shown in Fig. 5, the promi-

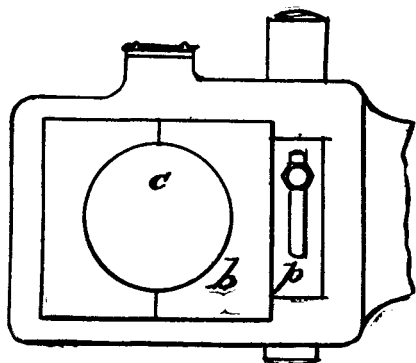


Fig. 5.—COUPLING ROD END—ITALIAN LOCOMOTIVE.

nent features being that the back brass, *b*, can, when the key is out, be moved back far enough to let the crank pin, *c*, pass through the slot in the rod, and thus facilitating the putting on and taking off of the rod. The method of securing the key is by means of a plate, *p*, provided with a slot, through which passes a bolt which screws into the key. This is a more expensive construction than two set screws without the plate would be, while it is certainly no better.

Coming now to the eccentric rods, they are of wrought iron, with one-half of the strap forged solid on the rod, the strap being brass-lined.

The boiler has one water gauge glass and three gauge cocks, all three being within the same range as the

glass of the water gauge. The dome top is provided with a spring balance, but a pop valve is provided separately. The boiler feed is by injectors situated under the foot plate. The engine brakes are operated from a hand screw, and act on one side of each wheel, only the force being applied to force the two wheels on one side of the engine apart.

The *Giovanni Darco*, No. 1,701, is an Italian engine designed this year, is a bogie engine with four wheels coupled, and has outside cylinders, ordinary crosshead and guide bars. Her connecting rod is a combination of several styles, as will be seen on reference to Fig. 6.

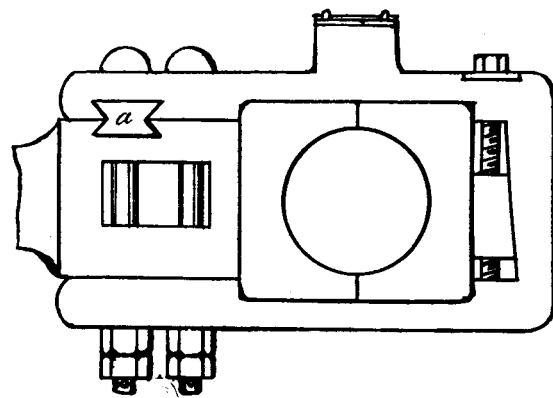


Fig. 6.—CONNECTING ROD ON AN ITALIAN LOCOMOTIVE.

The strap is held to the stub end by two bolts, as in ordinary English and some American practice; but a die, *a*, is introduced, which is a decided detriment, for a long experience of such dies taught me that they are very expensive to fit, very difficult to make a good job of, and get loose as soon as much duty is thrown upon them. They were first used on the Sharp-Roberts engines, but were soon discarded. The employment of a cap and collar for the wedge screw is also faulty, because it weakens the strap and does not look mechanical. The rod is of similar design at the driving end. The valve gear has Crampton eccentrics (that is, eccentrics driven from a return crank arm) and Gouch links, the slide spindle being provided with a crosshead sliding in a guideway, the steam chest being at an angle of about 40°. This engine has a hand screw brake gear, the brakes being released by weights.

Another engine, whose sign reads "Officina Meccanica

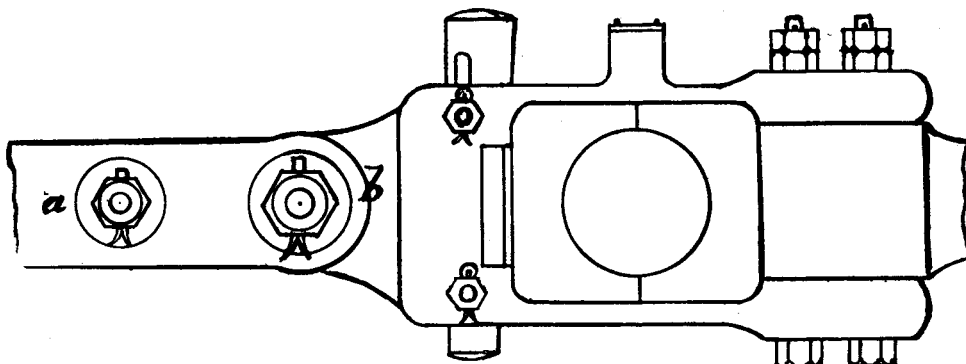


Fig. 7.—COUPLING ROD OF AN ITALIAN LOCOMOTIVE.

Miani Silvestri, 1889, Milano," has a bogie or truck, outside cylinders, and is six-wheel coupled. The most notable thing about her is her coupling rod, a section of which is shown in Fig. 7. I have not as yet been able to find an attendant at this engine, or I should have endeavored to discover the object of the second bolt (that at *a*) to the double eye. I presume, however, that it is to save wear at the joint, *b*, the tongue in the middle of joint, *b*, passing beyond *a*, and having a slotted hole to receive the bolt of *a*. To whatever extent the joint is made more rigid by this construction the body of the rod will have to bend in going round a curve. Hence there is no gain.

The method of securing the key is a decidedly expensive one, besides involving a good deal of trouble in getting the key in or out. The bolts, be it observed, pass through a slot in the key. It may also be pointed out that the keys are not given as much taper as in either English or American practice. I have not deemed the dimensions of the engine, or the construction of their boilers, etc., of sufficient importance to warrant my giving these details; indeed, I look upon them, the French, and the Belgian locomotives, as in a state of transition, not only so far as their general designs are concerned, but also with regard to the details.

On some of the Belgian engines here the smokestack is square, as in Fig. 8. Anything more unmechanical, as well as homely, it seems hard at first sight to imagine; indeed, one




Fig. 8.—A SQUARE SMOKESTACK ON A BELGIAN LOCOMOTIVE.

hardly knows whether to laugh or to get mad at it, but as the days wear on, one gets used to it, although not reconciled to it.

JOSHUA ROSE.

[SPECIAL CORRESPONDENCE OF THE SCIENTIFIC AMERICAN.]

### The Paris Exhibition.

THE UNITED STATES SECTION—GENERAL.

PARIS, July 20, 1889.

There are two exhibits in the American department or section that go far toward redeeming its general dullness. One of these is the exhibit of the engraving and printing department at Washington, D. C., around which linger authors, editors, publishers, engravers, printers, etc., and a fair share of the general public; and the other that of the Drake Co., St. Paul, Minn., whose exhibit consists of agatized woods from Chalcedony Park, Arizona. This latter exhibit stands out boldly in a glory and richness that draws the multitude at once, and makes it somewhat difficult to inspect it as one would like. The samples consist of sections of trees, ranging from 2 feet 6 inches in diameter, and say 2 feet high, down to pieces not more than 3 inches in diameter. Next come table tops of various diameters and disks suitable for ornamental work and clock faces, tiles suitable for interior decoration, door knobs, paper weights, etc. Of course it is the larger specimens that excite the most admiration, some table tops fetching from \$300 to \$400. I hear of its being employed for the decoration of mansions, especially for mantels, tiles for fireplaces, panels for over mantels, and other similar applications, where great durability combined with elegance is a requisite.

The geological interest in the exhibit arises from the fact that it is from the largest deposit (if it may be so called) of silicified wood in the world, containing, it is said, a million tons, covering a thousand acres, one of the fallen tree trunks being visible for a hundred feet in length, and forty-five feet of it forming a natural bridge. The geological interest in some of the samples lies in their having the bark on intact and perfect (which has hitherto been unknown) and in the remarkable brilliancy and beauty of the colorings, which is probably due to the exquisite polish they take. The colorings embrace every imaginable shade of the yellows, black, reds, grays, browns, white, and greens, combined in all sorts and manners of ways, not splashy as in marble, but sometimes blended, at others mottled or spotted, as it were; while in yet others they seem to radiate in circular waves from the center, almost like waved rays of colored sunlight. The specimens are solid to the core and without blemish. Some of them are small columns turned and polished; but the greatest beauty is shown in the across-grain surfaces. The black specimens, I think, are what are called by the West Indian aborigines *tacuba* posts, that is to say, in many of the hard woods the outside of the trunk is a light color, while the core (which is not usually more than about 8 or 10 inches in diameter) is dark, and in some cases a smoky black, just as the dark specimens here are.

Mr. F. C. Hatch, who is in charge of the exhibit, says they never find any bark on these dark specimens, and this lends probability to the supposition that they are *tacubas* or cores. There is one specimen attracting particular attention on account of its unusual degree of transparency in places, and in one of these places there is a coloring reminding one of the bloom on a well grown Hamburg grape or a luscious plum. A Russian dealer gave recently \$500 for a piece 28 inches in diameter and 30 inches long, to be cut into table-tops. Limb specimens are sold very freely at as low as \$2, the English especially being purchasers. The material is strong, of course, and exceedingly hard to cut and polish, and hence the expensiveness. To cut through a 2 foot log takes thirty days, and wears the saw down from 6 inches to 2 inches wide. Corundum and emery used in connection with a chemical are applied to the saws. The polishing is done on a large iron disk revolving horizontally and supplied with emery and a chemical. Small pieces are polished embedded in plaster of Paris. Some of the small specimens are cameo cut, and these are finding great favor as reminiscences of the exhibition.

The exhibit of the Bureau of Engraving and Printing naturally contains a great many examples of bank note work, and also engravings representing the heads of all the presidents, generals, admirals, and prominent officials and public men of the United States. The beauty of some of the engravings cannot be seen without the aid of a magnifying glass. It seems a pity that one of the engraving machines is not exhibited, but there are only three or four of them in existence, I believe, and all of them are kept in locked rooms and very zealously guarded all day and night. I am enabled, however, to give an idea of their construction and some interesting facts concerning them. The depth of the lines of the border work say of a green-back is the one three-thousandth part of an inch deep, and the tool goes over the line thousands of times before it is cut to that depth. The tool-cutting edge is formed by grinding three flat facets at an angle of 45° to the center line of the tool, the cutting point thus formed being at the extreme end or point of the tool.

The engraved plates for printing bank notes are inked with the palm of the hand (for which there has not as yet been found any substitute), and if the plates are left soft, about sixteen thousand inkings wear out the plate. Of course it would be out of the question to harden these plates in the usual way, as the warping alone would destroy them, but it is a fact that a process of casehardening them "cold" has been discovered and practiced by a skillful mechanic in New York city named Whitely. I am not prepared to say that the term cold is strictly correct, although that is what is generally stated. I am of opinion, however, that a temperature of say about boiling point is employed. The process is of course a dead secret and is on doubt purely chemical. The specimens I examined were fairly well casehardened and had not been heated enough to change their color in the least. The casehardened plates will print about 50,000 or 60,000 impressions. The motions of a bank note printing machine may be very roughly described as follows: A sliding table having rectilinear motion carries a compounding table having similar motion, but in a line at a right angle to that of the first. The length of stroke and the speeds of these two tables may be varied at will, so that either of them may be made to have equal or unequal stroke in a given time, the range of combinations running into the thousands. The upper table carries the work-holding chuck which may be an elliptical or any other kind of chuck suitable for the class of work in hand. The tool is mounted in a rest on a slide that spans the tables.

The number of change wheels for setting the combinations for the table motions are bewilderingly numerous, and it requires a wonderful amount of skill to work the machine. It took the English a good many years to perceive or at least to acknowledge the superiority of the work of this engraving machine, but about six years ago an English firm bought from the maker in Newark, N. J., a machine for \$8,000, but the maker refused to deliver the machine until a man had been sent out to learn to work it, which after much discussion was done; but the man, who was an expert upon English machines, didn't want to be taught, but to be left alone with the machine, so as to show how foolish it had been to bring him to the United States to learn how to use an engraving machine. So he was left alone with the machine for three weeks, after which time he gave it up and meekly requested to be taught. The work on these engraving machines must be of the very highest order, better than for any other machine that is made of metal. A rather curious fact with reference to this section of the exhibition is that while every State in the Union has appointed and has a commissioner here, only one State (Florida) has a State exhibit, the other commissioners having nothing whatever to do.

The Florida exhibit consists of cotton, tobacco, resin, wood, and sponges, with some photos and a few other unimportant items, occupying in all a small space of about 60 feet by 14 feet high. One thing that detracts from the United States general section is that it does not compare at all well in the matter of the general decoration or ornamentation, upon which a good deal has been spent in the general sections of other countries.

The brass work exhibited by the Robertson Lamp Co., of New York, contains some excellent exhibits, and there is no doubt that brass work for the household is one of those things that is bound to increase very much in the United States. Brass bedsteads are beautiful and elegant, and just the class of work on which Americans can bring self-acting machinery to bear so as to avoid expensive labor.

The Rookwood exhibit of art pottery, small as it is in comparison to that in some of the foreign sections, is quite up in quality to any of them. In one point the American sections surpass all others, and that is the visitor has no trouble in finding out anything he wants to know. One only has to show an interest and the attendants are alert, in a moment giving every detail of information, pointing out this, explaining that, and referring to the catalogues, which are far better got up than those of any other nation.

JOSHUA ROSE.

### Dentistry in 1796.

American dentists of the present day may, with justice, lay claim to a high reputation for skill and ingenuity. The autograph letter of Washington, which appeared in the *Journal* of June 17, showed that considerable enterprise was shown also by our dental forefathers. We have before us an interesting document which gives quite accurately the degree of proficiency which had been reached in dentistry toward the close of the last century. It consists of an advertisement issued by one Josiah Flagg, surgeon-dentist, who "informs the public that he practices in all the branches with improvements, *i. e.*, transplants both live and dead teeth with great conveniency, and gives less pain than that heretofore practiced in Europe or America; sews up hare-lips; cures ulcers; extracts teeth and stumps or roots with ease; reinstates teeth and gums that are much depreciated by nature, carelessness, acids, or corroding medicine; fastens those teeth that are loose, unless wasted at the roots; regu-

lates teeth from their first cutting to prevent fevers and pain in children; assists nature in the extension of the jaws for the beautiful arrangement of the second set, and preserves them in their natural whiteness, entirely free from all scorbutic complaints. And when thus put in order, and his directions followed (which are simple), he engages that the further care of a *dentist* will be wholly unnecessary; eases pain in teeth without drawing; stops bleeding in the gums, jaws, or arteries; lines and plumbs teeth with virgin gold, foil, or leads. Fixes *gold roofs and palates*, and artificial teeth of any quality, without injury to, and independent of, the natural ones; greatly assisting the pronunciation and the swallow, when injured by natural or other defects. A room for the practice, with every accommodation at his house, where may be had dentifrices, tinctures, teeth and gum brushes, mastics, etc., warranted approved and adapted to the various ages and circumstances; also chew-sticks, particularly useful in cleansing the fore teeth, and preserving a natural and beautiful whiteness; which medicine and chew-sticks are to be sold wholesale and retail, that they may be more extensively useful.

"Dr. Flagg has a method to furnish those ladies and gentlemen, or children, with artificial teeth, gold gums, roofs, or palates, that are at a distance and cannot attend him personally.

"Cash given for handsome and healthy live teeth, at No. 47 Newburg Street, Boston (1796)."

The document is ornamented in one corner by very formidable and antiquated instruments, while in the other are to be seen tooth brushes quite of the modern pattern. It has been preserved by a descendant of one who, as may be seen on the back, purchased a brush and tincture from Josiah Flagg in the year 1800. —*Boston Medical Journal*, 1875.

### Sense of Smell in the Horse.

The horse will leave musty hay untouched in his bin, no matter how hungry. He will not drink of water objectionable to his questioning sniffs or from a bucket which some other odor makes offensive, however thirsty. His intelligent nostril will widen, quiver, and query over the daintiest bit offered by the fairest of hands. A mare is never satisfied by either sight or whinny that her colt is really her own until she has certified the fact by means of her nose. Blind horses, as a rule, will gallop wildly about a pasture without striking the surrounding fence. The sense of smell informs them of its proximity.

Others will, when loosened from the stable, go directly to the gate or bars opening to their accustomed feeding grounds; and when desiring to return, after hours of careless wandering, will distinguish the one outlet and patiently await its opening. The odor of that particular part of the fence is their guide to it. The horse in browsing, or while gathering herbage with his lip, is guided in its choice of proper food entirely by its nostrils. Blind horses do not make mistakes in their diet. In the temple of Olympus a bronze horse was exhibited, at the sight of which six real horses experienced the most violent emotions. Ælian judiciously observes that the most perfect art could not imitate nature sufficiently well to produce so perfect an illusion. Like Pliny and Pausanias, he consequently affirms that "in casting the statue a magician had thrown hippomanes upon it," which, by the odor of the plant, deceived the horses, and therein we have the secret of the miracle. The scent alone of a buffalo robe will cause many horses to evince lively terror, and the floating scent of a railroad train will frighten some long after the locomotive is out of sight and hearing. —*Horse and Stable*.

THERE was an interesting exhibition recently at the naval proving ground at Annapolis of the Maxim automatic machine gun, under the direction of Mr. Hudson Maxim, a brother of the inventor. The *Army and Navy Register* says: Three guns were used, two rifle caliber guns and a 1-pounder, caliber 37 millimeters. These guns were built in England, and are much more perfect than those which were exhibited to our war and navy departments a year and a half ago, and at that time awakened so much interest. The rifle caliber guns yield 700 to 750 shots per minute respectively. The 1-pounder yields nearly 400 shots per minute. Over 100,000 rounds of ammunition had been purchased for this trial, and a large party was present, including Commodore Sicard, chief of ordnance. Two 6-pounder Maxim guns, built on the same principle as the smaller guns, are expected here soon, and will be tried on the same grounds. One semi-automatic gun fires 60 shots per minute and the other, which is fully automatic, will give 150 shots per minute. It is probable that a company will soon be established in this country for the manufacture of the Maxim guns.

The best builders keep on file the *Architects and Builders Edition of the "Scientific American."* It enables a person about to build to select from the engravings the style of house suiting his fancy and purse.

**The San Diego Flume.**

This work is described in the *Golden Era*, San Diego, Cal.

The head of the system is in the Cuyamaca mountains, nearly 5,000 ft. above the sea. Here a reservoir is formed by a dam 35 ft. high and 720 ft. long, impounding about 3,740 million galls. of water and covering 900 acres. From the reservoir the water passes down a rocky ravine about 12 miles to the San Diego river, and just below this point of juncture with the river is a dam of solid masonry diverting the stream into the flume through regulating gates. This dam is 400 ft. long and 35 ft. high, and cost \$36,000. Behind this dam is another lake of considerable dimensions.

From the head gates to the reservoir, 8 miles from the city of San Diego and 630 ft. above the city, is a distance of  $35\frac{3}{4}$  miles. This is the length of the flume proper. This flume is 6 ft. wide and 4 ft. high and is built of clear redwood plank 2 in. thick. At present but one tier of side planks is used, making the height 16 in. The full capacity of this flume is 5,000 miner's in. daily, or 65,000,000 galls., a quantity sufficient to irrigate 100,000 acres. The trestle work on this flume line is very substantially built, and the Los Coches trestle, one of the largest, is 65 ft. high in the deepest part of the valley and 1,774 ft. long; the Sweetwater trestle is 81 ft. high and 1,264 ft. long, and many others assume very considerable proportions. The total number of trestles is 315. The gradient throughout is 4 ft. 9 in. per mile. In addition to the trestles a number of tunnels had to be driven, 6 ft. square, or arched where the rock was bad. The longest tunnels are: Laukersheim, 1,900 ft.; Los Coches, 313 ft.; El Monte, 290 ft.; Cape Horn, 700 ft.; South Fork, 200 ft.; Anderson, 270 ft.; and Sand Creek, 430 ft. long.

Besides supplying the city of San Diego, through the distribution system of the Coronado Water Co., this water is to be utilized for irrigation purposes, the surplus supply being sufficient for 40,000 acres. The present watershed under control is set down at 150 sq. miles, and other storage reservoirs will be constructed as the need arises. One of these sites, near the La Mesa tract owned by the company, will impound 760,000,000 galls. of water, and the other has a capacity of 1,250,000,000 galls.

**THE LIGHTNING FLASH.**

We illustrate in the accompanying cuts two very beautiful examples of photographs of lightning flashes. For many years a radical misconception obtained as to the shape of a flash. It was represented very generally by the artist as of zigzag shape. This is seen in old remains of art in the representation of the thunderbolts of Jupiter. Photography has done much to dissipate this erroneous view, but even without its aid the eye could, if prepared, see that the conventional shape was incorrect. Thus in watching the discharge of a powerful induction coil or of a Holtz machine, a certain sinuosity of outline can be recognized.

In the engravings the same form is to be seen. Nothing of the zigzag appears, and there is a total absence of anything approaching regularity. One cut shows a discharge which is exceedingly curved, its curious path being traced out in relief against the dark sky, the reasons for its course being quite unknown. Prof. Lodge's characterizations of the eccentric nature and ways of the flash seem quite warranted. In the other cut two flashes are shown, which exhibit the branching effect now often caught upon the sensitive plate.

The recent investigations by Profs. Herty and Lodge have done much to confuse as well as enlighten the mind upon this subject. The discharge of the Leyden jar can no longer be treated as a simple action. On the contrary, it is complex and consists of a series of oscillations, first in one direction and then in the other, lasting but an extremely short time, but in a small fraction of a second beating back and forth many hundred times. Prof. Lodge, addressing himself to the practical view of the subject, studied lightning rods and came to several rather startling conclusions. He decided that iron was a better material than copper, and that slight imperfections or even breaks in its continuity did little harm.


So radical a departure from the views hitherto held by scientists was not allowed to pass unchallenged, and Mr. Preece and others have opposed them strenuously. At the recent meeting of the Society of Electrical Engineers held in this city, Prof. H. A. Rowland, of Johns Hopkins University, spoke against them. He expressed his doubt as to whether the discharge of a thunder cloud was, as a rule, oscillatory at all, and thought that no comparison could properly be drawn between

the natural and the Leyden jar phenomena. In regard to protection for a house, he expressed his opinion that a series of conductors crowning the roof in various directions and connected to copper wire conductors running to the ground would be efficient. Copper wire one-fourth inch in diameter, he stated, would be the proper material.

We are indebted for the original photographs from which our engravings were made to Mr. G. E. Davis, who is an amateur photographer, residing at Dubuque, Ia. Much of the effect of the photos is lost in the cuts.

**HOW TO PERFORATE GLASS.**


To make a small hole in a plate of glass is a comparatively simple matter. All that is required to do it is a

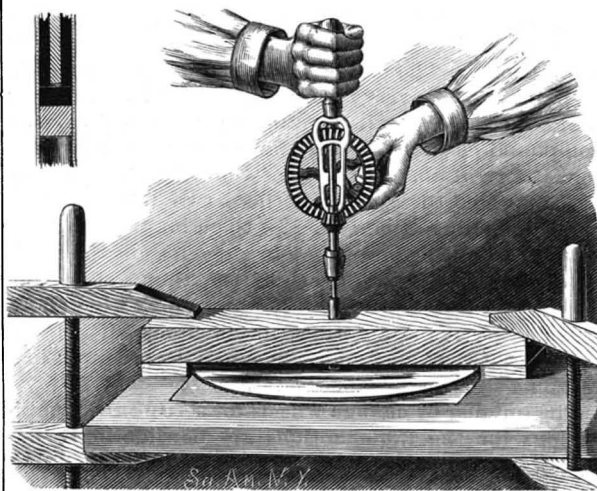

PERFORATING GLASS.

very hard, sharp drill, some means for turning it, and a lubricant, such as turpentine, for causing the drill to cut rapidly. A drill made in the usual form from steel wire and hardened by heating it until it is dark red and then plunging it in mercury, will be very hard, but not tough. Before the drill is heated it should be driven into a block of lead so that its point will just be inclosed by the lead, and after the drill has been hardened in the mercury its point should be inserted in the indentation in the lead, and the temper of the shank of the drill should be drawn over a lamp or gas flame to a blue. The lead prevents the drill point from becoming heated sufficiently to draw the temper, by conducting the heat away as fast as it arrives at the point. When the shank of the drill becomes blue to within a short distance of the lead, the drill, together with the lead, should be plunged into cool water.

The drill prepared in this way should be wet with turpentine while in use to cause it to "take hold." It is advisable to drill from opposite sides of the glass whenever this is possible. The hole may be enlarged by means of a sharp round file wet with turpentine.

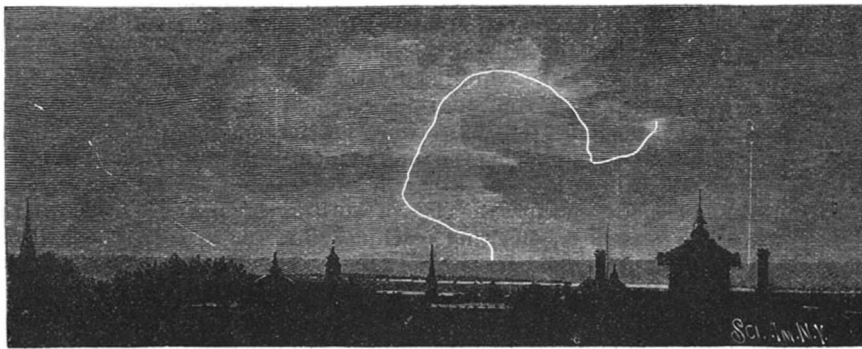

PHOTOGRAPHS OF LIGHTNING.

When larger holes are required these can not conveniently be made with a drill. A copper or brass tube charged with emery and water or emery and turpentine, and rotated in contact with the glass, will soon cut a hole a little larger than the tube.

Simple ways of guiding and revolving the tube are shown in the annexed engraving. The glass to be drilled, which may be the plate of an electrical machine for example, is placed upon a table with a few thicknesses of paper underneath its center. Two blocks are placed on the table at diametrically op-

posite edges of the disk, and a thick bar of wood, which is bored at the center to receive the copper or brass tube, is placed upon the blocks and clamped firmly to the table. The glass plate is arranged so that its axis coincides with that of the hole in the bar. The plate is then clamped in place by gently inserting two wooden wedges between the wooden bar and the glass.

The tube by which the cutting is done is stopped by a wooden plug at the middle of its length, and in the upper part is inserted a soft rubber stopper which rests upon the wooden plug, also a piece of heavy rubber tubing which rests upon the stopper. In the rubber tube is inserted one end of a close-fitting metal shank, the other end of which is fitted to an ordinary drill stock. This arrangement provides for a certain amount of flexibility in the connection between the tube and the drill stock. The tube is revolved by the gearing of the drill stock while it is supplied with a mixture of No. 4 emery and water or emery and turpentine. The pressure on the drill stock should be light, and the tube must be lifted frequently to allow a fresh supply of emery to reach the surface being cut. This device makes a hole in the glass in a short time.

If a larger aperture is desired the glass is first drilled in the manner described, and enlarged by careful cutting with a diamond.

**The Stove Trade.**

The annual convention of the National Association of Stove Manufacturers was held at Saratoga, N. Y., June 19. We take the following from the address of the president, Mr. Geo. H. Barbour: I have reason to believe that the spring trade, which has just passed, has been anything but satisfactory to many of us. Under such conditions will it not prove profitable to consider briefly the causes and see if we can point out some of the remedies? My first would be that merchants may have carried over a larger stock of cooking stoves and ranges from fall purchases than we may have estimated.

Another, and perhaps the main, cause of a general shrinkage is the growing sale of gasoline stoves, for which we do not make sufficient allowance, and those of us who do not manufacture or sell this class of goods should take this into consideration. Allowing that the prices of pig iron have ruled low during the past six months, I do not consider this has any essential bearing upon the present condition of business; a reduction of \$5 per ton in the price of iron only reduces the cost of a 200 pound stove fifty cents, and seventy-five cents on a 300 pound stove, and even this reduction is more than made up by your yearly outlay on patterns, additional ornamentations, etc. Who of us ten years ago would have thought stove manufacturers would be using ornaments to adorn our stoves at a cost of one to two dollars? But such are the facts to-day, besides largely increased expenses in various ways. In addition to this, the weather has been against general business; but be this as it may, what are the remedies? I can offer but one, as this condition of things I have mentioned is liable to come up at any time. It is this: We, as manufacturers, have got to watch our business all the more closely and endeavor to keep our production well in hand, so that if the demands decrease, we will not find ourselves with large stocks on hand.

I believe this subject of allowances has had a great deal to do in bringing about disappointment to many of us when the results of the year's business have been ascertained. We may sometimes conclude when some good customer asks for a special five per cent discount or for an allowance of freight, with no cartage, etc., to allow it, but let us see what such decisions may cost us in our year's business.

Suppose Mr. A. has a business whose yearly sales average say \$600,000. He is anxious to largely increase his business, he wants to swell the volume up to \$900,000, and concludes, as an experiment, to reduce his prices five per cent; just see what this means; if he should only sell \$600,000 worth, it would cost him \$30,000, and if he sold \$900,000 worth, \$45,000.

The first named amount means ten per cent on a capital of \$300,000, and the second amount fifteen per cent.

Now, is there any member present who believes that any stove manufacturer in this country could do business many years on any such a basis? I think not.

Now, just consider for a moment the reverse of this state of things, that on the above amount of sales he tries to get five cent better prices; see what a nice profit it is of itself.

THE so-called antique oak is ordinary American oak sawed in a peculiar way and stained to look like the old English oak.



**THE RETSOF SALT MINES AT GREIGSVILLE, N. Y.**

BY S. L. SHELDON.

The Retsof salt mines are situated in the southern part of the town of York, Livingston County, N. Y.

The name under which the works are conducted is The Retsof Mining Co. This company was formed in New York City, under the able management of Mr. J. W. Foster, after whom it was named, the name of the mine being the word "Foster" spelled backward.

The great undertaking of channeling for salt was commenced in the fall of 1884. A whole million was expended to accomplish the work, which occupied about a year and a half. Now, however, these mines yield bountiful returns, being one of the best paying industries in the country.

Five hundred tons are taken out daily and sent to all parts of our Union; to the West, for salting cattle; to the East, for making soda ash; to New York, for statutory; and to many other places, for miscellaneous uses.

The supply seems to be inexhaustible. It is claimed that it will last for a thousand years.

In the vicinity of the mines a whole village of wooden huts and houses have been constructed, also boarding houses, stores, and offices have turned the once desolate place into busy bustle. In the midst of all rises a huge tower, which is the head house or entrance to the mines, and also serves as an elevator by which the salt is conducted into great chutes and store houses. At the east of this tower are the boiler and engine rooms, where twelve boilers, with a capacity of nine hundred and sixty horse power, furnish the force to run the powerful machinery. To run the twenty foot drum on which the cable is wound requires three hundred horse power. To run the blower, crusher, air compressor, and electro-dynamo also requires powerful engine power. Two hundred men are employed about these mines. Most of these are Italians.

At present the mines are reached only by one shaft, although the second shaft is down about two hundred feet. This entrance is a vertical shaft, 16 by 20 feet and 1,185 feet deep. It is provided with two cages, drawn up and down by cables, and these are so arranged that when one is ascending, the other is descending.

The sensation of descending into the mines is somewhat peculiar. For the first five hundred feet the descent is natural, but for the remaining distance one seems to be ascending. The descent to the mines, which are about 1,085 feet deep, occupies about a half minute.

At present the mines are located in the upper stratum. There are two strata of salt, the first about 9 feet thick, the second, separated by 12 feet of rock, is about 60 feet thick. Excavation is commenced at the top. Then, of course, when the second stratum is being worked, supports will be left at different points, so that there will be no danger.

The mine, which has been worked about three years, presents mainly such an appearance as is seen in the diagram, except the representation of numerous cross cuts, now all the time being excavated. The cross cuts represented in the diagram are those through which the rail cars run.


The main gangway extends due east about a quarter of a mile. This is about nine feet high and from four to eight yards wide. Leading off on either side there are 25 chambers at right angles to the gangway, on the north 13, on the south 12. These chambers extend about 30 rods on either side the gangway and are nearly as large as the gangway. The chambers, as buildings of a city, are designated with even numbers on the one side and odd numbers on the other.

The shaft enters the mine at the west of the main gangway, while a little to the north there is an air shaft in construction. Situated in No. 2 are the mule stables, which can accommodate 15 or 20 mules. In No. 6 is the blacksmith's shop. As this stratum is undulating and slopes toward the west, so also does the mine. It is calculated that half as much salt will be left in the pillars as there is taken out, *i. e.*, one-third of the salt will be left for support.

The process of loosening the rock salt from its firm bed is accomplished by blasting. Holes made into the

salt with air drills are filled with dynamite, which is exploded by electricity. Then the loose salt, on cars holding about four tons, is drawn to the shaft over a railroad by mules. At present eight mules are employed in hauling the salt. They are kept in the mine all the time, either in the stables or in the barnyard. Nearly one hundred men are employed in the mine, either as foremen, mule drivers, miners, or their assistants.

In the mine the air is quite pure. This condition is

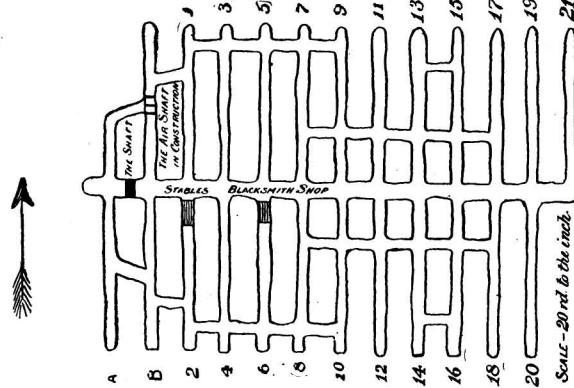

A DIAGRAM OF THE INTERIOR OF THE MINE.

obtained by drawing out the foul air and forcing fresh air in. The air is dry as well as the mine, and has a chloric smell and a saline taste. The temperature is about 60° Fahr. The most noticeable feature to a novice is its darkness and absolute stillness. It has a peculiar silence of its own. All disturbances, elemental and otherwise, which prevail in the open air are unknown and unfelt. The nervous person can there feel secure from the feeling of alarm which a thunder storm excites.

The miners use tallow candles to dispel the depressing darkness, the foremen, drivers, and shovelers use kerosene lamps, while the poor mules have to stumble around in the dark.

One of the strangest sights to a visitor is the blacksmith's shop under ground. It is a very convenient and important feature of the mine, however, and Vulcan has a busy time indeed shoeing mules and sharpening the miners' drills.

The mine seems to be supplied with all modern conveniences. Among them is a telephone where one can converse with the superintendent above, an air whistle used as a signal for commencing and quitting work. There is also a system of pipes running to the different chambers which supplies the drills with compressed air.

The largest part of the salt taken out of the mines is of a dark gray color, and is claimed to be purer than that of a lighter color, being free of magnesia. Other

**Generous Gift for a Great Photographic Telescope.**

Dr. Edward C. Pickering, director of Harvard College observatory, sends us a circular stating that the astronomical observatory of Harvard College has received from Miss C. W. Bruce, of New York, a gift of \$50,000, to be applied "to the construction of a photographic telescope having an objective of about twenty-four inches aperture with a focal length of about eleven feet, and of the character described by the director of the observatory in his circular of November last; also to secure its use under favorable climatic conditions in such a way as in his judgment will best advance astronomical science."

This instrument will differ from other large telescopes in the construction of its object glass, which will be a compound lens of the form used by photographers and known as the portrait lens. The focal length of such a lens is very small compared with its diameter, and much fainter stars can be photographed in consequence. The advantage is even greater in photographing nebulae or other faint surfaces. Moreover, this form of lens will enable each photographic plate to cover an area several times as great as that which is covered by an instrument of the usual form. The time required to photograph the entire sky is reduced in the same proportion. A telescope of the proposed form, having an aperture of eight inches, has been in constant use in Cambridge for the last four years, and is now in Peru photographing the southern stars. It has proved useful for a great variety of researches. Stars have been photographed with it too faint to be visible in the fifteen inch refractor of the observatory. Its short focal length enables it to photograph as faint stars as any which can be taken with an excellent photographic telescope having an aperture of thirteen inches. The eight inch telescope will photograph stars about two magnitudes fainter than can be taken with a similar instrument having an aperture of four inches. A corresponding advantage is anticipated from the increase of the aperture to twenty-four inches. Each photograph will be thirteen inches on a side, and will cover a portion of the sky five degrees square, on a scale of one minute to a millimeter. The dimensions will be the same as those of the standard charts of Chacornac and Peters. The entire sky would be depicted upon about two thousand such charts.


It is very important that the best possible location should be found for such an instrument. In Europe and in the eastern portions of the United States, where nine-tenths of the principal observatories of the world are situated, it is cloudy for a large portion of the year. Great advantages are expected from a location where clouds and haze are seldom seen.

This generous gift offers an opportunity for useful work such as seldom occurs.

It is expected that the Bruce photographic telescope will exert an important influence upon astronomical science by the large amount of material it will furnish.

**Progress of the Metric System.**

At a recent meeting of the French Academy of Sciences, M. De Malarece, speaking of the extension of the metric system of weights and measures, gave some interesting figures. In 1887 the aggregate population of the countries in which the metric system was compulsory was over 302,000,000, being an increase of 53,000,000 in ten years. In 1887, in countries with a population of close on 97,000,000, the use of the system was optional; and the countries where the metric system is legally admitted in principle and partially applied (as in Russia, Turkey, and British India) had, in

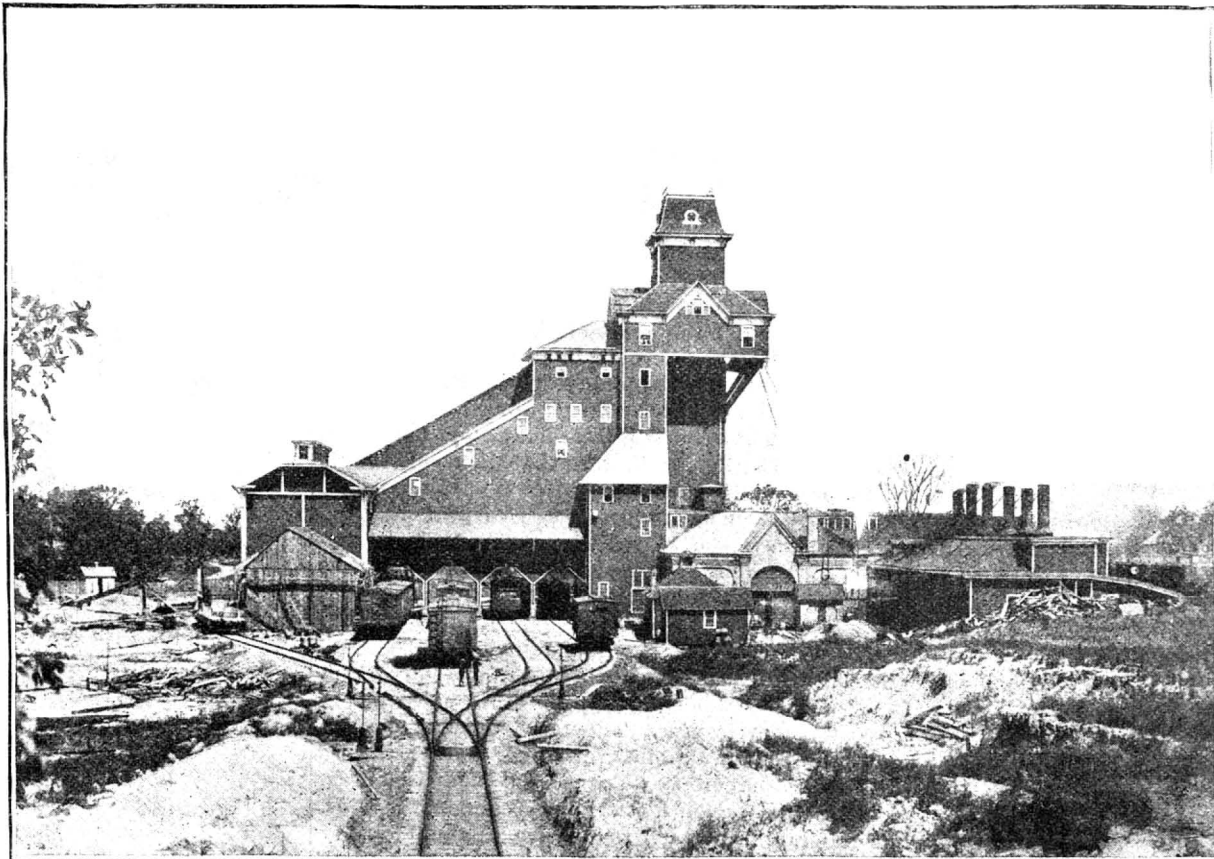

THE RETSOF SALT MINE, NEW YORK STATE.


portions of salt are of a reddish cast, while occasionally clear crystals the size of a man's hand are obtained. These crystals are found next to the rock, and are fastened so tightly to it that they are usually destroyed in separation. The crystal salt is chiefly found on the north side of the mine.

Persons contemplating building will find it to their advantage to subscribe for the Architects and Builders Edition of the "Scientific American." \$2.50 a year. Single copies 25c.

1887, a population of 395,000,000, being an increase of 54,000,000 in ten years. The increase is due to the growth of population in countries which had already adopted the system and to its adoption by new countries. The systems of China, Japan, and Mexico are decimal, but not metric. The metric system is thus legally recognized by 794,000,000 of people, and the three last named countries have a population of about 474,000,000. So that only about 42,000,000 of inhabitants of the civilized world have systems which are neither metric nor decimal.

### SIMPLE SCIENTIFIC EXPERIMENTS. EXPERIMENTS WITH EGGS.

Some of the phenomena of fluid friction may be beautifully shown by very simple experiments devised by Sir William Thomson. The materials necessary are two eggs—one raw, the other hard boiled; two rubber bands of such a size as to clasp an egg firmly when slipped on lengthwise; two thin steel wires, about the size of those sometimes used as E strings on guitars; and a mirror or a large plate, or other smooth surface,

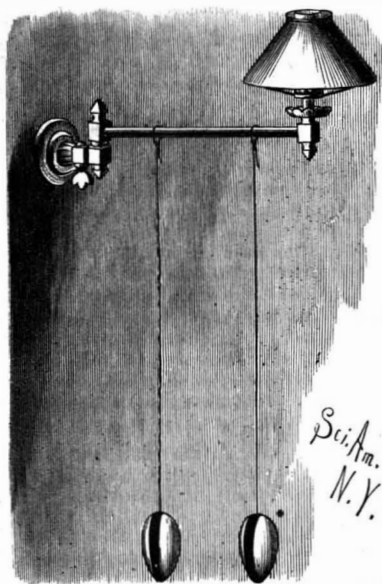

with a ledge around it to prevent the eggs rolling off.

From a gas fixture, or other convenient support, the two wires are hung, and to the lower end of each one is fastened one of the rubber loops. Into these loops the eggs are slipped, with their long axes vertical, as shown in the figure. Grasping one egg in the fingers of each hand, they are gently turned once or twice round and


then let go. The eggs show a surprising difference in behavior. The boiled egg keeps twisting to and fro, after the manner of a torsion pendulum, while the raw one comes almost immediately to rest. The explanation is easy. The hard boiled egg, being rigid throughout, turns as a whole, while the raw egg, being soft inside, has only its shell moved by the torsion of the wire, the contents remaining stationary, because of their greater inertia. The shell is thus made to rub to and fro on its contents, and being very light, is soon brought to rest.

Sir William Thomson has used this experiment to illustrate one of the proofs that the interior of the earth is solid. If the earth consisted of a thin shell or crust of hard rocks surrounding a fluid or pasty nucleus, as has been until recently generally taught, he says that the observed swinging and swaying motions of the earth's axis in precession and nutation would be impossible. Any such motion would soon be stopped by interior friction.

Place the eggs on the mirror or plate and try by a sudden twist with the fingers to spin them on end like tops. With the boiled egg one readily succeeds, but the raw egg will hardly make a single rotation before it falls on its side. The finger twist has merely moved the shell, the inside remaining at rest. Professor Mendenhall has remarked that this experiment furnishes a solution to Columbus' problem—how to make an egg stand on end: first boil the egg hard, and then spin it.

The third experiment is the one that occasions greatest surprise. The boiled egg is spun on its side on the glass, and the palm of the hand is then gently brought down upon it for an instant. The rotation, of course, stops at once. But when the same thing is tried with the raw egg, as soon as the hand that stops it is removed, its rotation begins again. In this case, when the shell is stopped, its fluid contents remain in motion, and, rubbing against it, set it in motion when the hand is taken away. It astonishes one to find how long the egg may be held still before this effect stops!

### SMOKING AN EMPTY PIPE.

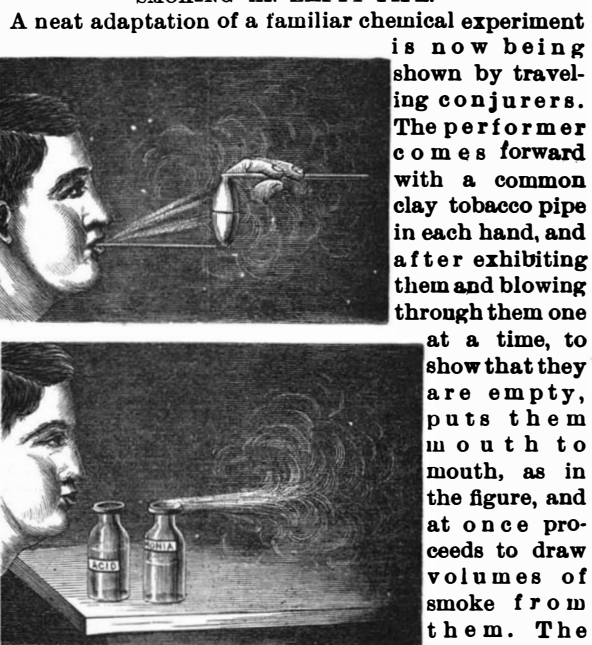

A neat adaptation of a familiar chemical experiment is now being shown by traveling conjurers. The performer comes forward with a common clay tobacco pipe in each hand, and after exhibiting them and blowing through them one at a time, to show that they are empty, puts them in his mouth, as in the figure, and at once proceeds to draw volumes of smoke from them. The merest tyro in

chemistry will at once rightly guess that one of the pipes is slightly moistened inside with hydrochloric acid and the other with ammonia, and that the clouds of smoke are merely fumes of the salt ammonium chloride formed by the combination of the vapors of the two chemicals.


An effective way to show the same experiment to a class is to blow across the mouths of two bottles containing strong ammonia and hydrochloric acid, and placed in line with the lips. A large room may thus be filled with dense fumes in a few minutes. A. B. P.

### The Making of Diamonds.

The practical production of the diamond by artificial means has been the theme of a great deal of thought and a good many experiments, but up to this time it has eluded all the efforts of the experimenters, though carbon crystals closely approaching the gem have more than once been secured, while many persons still think it is merely a matter of time, and not a long one at that, when this secret will have been wrenched from nature. In some recent experiments on the effect of high temperature and pressure on carbon, by C. A. Parsons (*Journal of Chemical Society*), carbon rods were surrounded by benzine, paraffin, treacle, chloride or bisulphide of carbon, and submitted to great pressure in a hydraulic press, the rods being meantime heated by passing an electric current through them. In some cases a considerable amount of gas was evolved, and a soft, friable deposit of carbon produced. In no case was the density of the carbon increased. When the rod was surrounded with silica the latter fused, and the rod was largely converted into graphite; the same occurred with hydrated alumina in lime or magnesia, the rod being rapidly destroyed with evolution of gas. With layers of coke, lime, and silica, the rod was rapidly corroded, and was found after the experiment to be coated with a coke-like layer of great hardness, sufficient to scratch rock-crystal and ruby and to wear down the cut facets of a diamond. It resists the action of a mixture of hydrofluoric and nitric acids.

### AN IMPROVED LIFTING JACK.

The accompanying illustration represents a device more particularly designed as a lifting jack for carriages, which has been patented by Mr. J. Merritt Smith, of Greenwich, Conn., Fig. 1 being a perspective

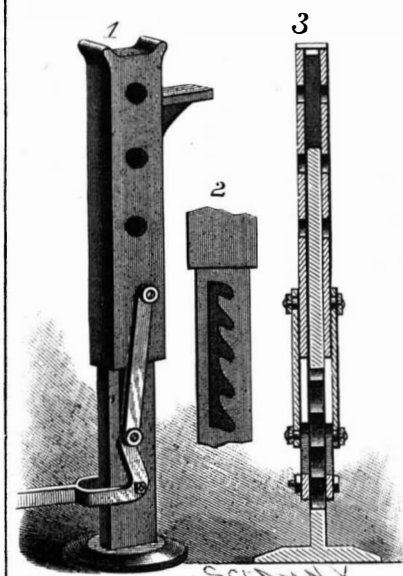

SMITH'S LIFTING JACK.


and Fig. 3 a vertical sectional view. The vertical stationary post or standard of the jack is a solid flat bar having a vertical slot, in one edge of which is a series of downwardly-inclining branch slots or pockets, as shown in Fig. 2, the lower walls of these pockets forming rests or supports for the fulcrum pin of the operating lever. The hollow bar or case constituting the lifting upright of the jack slides up and down this stationary post, and is connected by opposite side links with the curved inner upper end of the operating lever, the fulcrum pin of which is placed in any one of the notches or branch slots of the standard, according to the height the lifting upright is desired to start from. The operating lever has a stop, in the slot receiving the stationary post, so that when the lever is fully down, the side links connecting it with the lifting upright will be in an approximately vertical position, or so that the line of resistance may be a trifle on the inside, to prevent shifting of the fulcrum pin, thus making the jack automatically lock itself when raised.

### Peanuts.

According to a correspondent of the *New York Evening Post*, 3,200,000 bushels of peanuts are consumed in this country every year. They come chiefly from Virginia and North Carolina, although Tennessee also produces a small crop. "Peanuts are planted at corn-planting time. Each kernel produces a running vine, like crab grass, and each root produces about twenty pods. When ripe, the plow is run through the loamy soil, on a dry day, just before frost. The nuts are dried and shocked up like corn to keep dry before housing. When marketed, they go to a cleaner, where they are put through steam power machines and polished, after which they are graded according to size and variety. This year there is but two-thirds of a crop, and they are higher in price than since 1884. The crop begins to come into the market about the first of September. The Virginia nut is the largest and finest. The Wilmington is a smaller sort, and the Spanish nut, a still smaller variety, is one whose kernels peel perfectly clean, thus making it valuable for confectionery."

### AN IMPROVED WALL PAPER PROTECTOR.

A hand device to hold against the wall of a room when the base boards, door frames, etc., are being washed, to prevent soiling the paper, and allow the cleaning to be done close up to it, is illustrated herewith, and has been patented by Mr. Frederick W. Woodhull, of Lincoln University, Chester County, Pa. The body of the protector, A, is preferably made of sheet metal, with its ends, b b, turned outward or back, and its longitudinal marginal portions, c c, preferably set

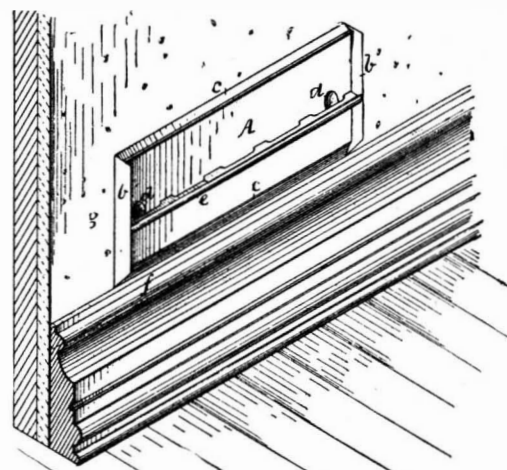


WOODHULL'S WALL PAPER PROTECTOR.

inclining outward from the face of the body. Two indentations, d d, are made in the body from its back, forming partly spherical protuberances on its face, which rest on the paper to be protected, their form preventing injury, and giving the protector a slight pitch, so that its longitudinal margin will fit close to the woodwork. Upon the back of the body and extending its whole length is a handle, e, soldered or otherwise suitably attached. It is said that preparations are being made to manufacture these protectors in large quantities. See business and personal column.

### AN IMPROVED FENCE.

The accompanying illustration represents a fence more especially designed for inclosing cemetery lots, but also well adapted for use in connection with lawns, gardens, and pleasure grounds, etc. It forms the subject of a patent issued to Mr. Henry E. Macrea, of Hudson, N. Y. Fig. 4 represents a fence constructed according to this invention, Fig. 1 being a broken and partly sectional elevation showing the manner of connecting the metal rods or tubes with the stone post. The post has tapering recesses or sockets of circular dovetail shape in its opposite sides, into which are inserted first one and then the other of two loosely fitting half sleeves encircling the rods or tubes, as shown in Fig. 2, each half sleeve rocking upon a pin or bolt passing transversely through the rod or tube, such pin or bolt engaging with notches in the faces of the half sleeves. An outer flange or nut is made to fit the rod or tube freely, and also to receive the outer end portions of the half sleeves, when these portions are brought together, as shown in Fig. 1, whereby the inner end portions of the half sleeves are spread outward within the tapering sockets, forming locking devices. Fig. 3 shows a modified form of construction in which the outer flange or nut is screwed on to the half sleeves to hold the latter in locked position. This invention is also applicable to fences or railings in which metal uprights or rods are secured at their lower

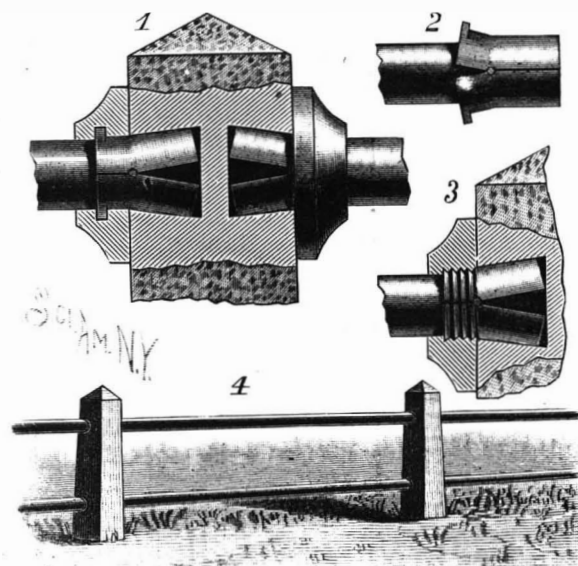

MACREA'S FENCE.

ends in stone sills, or may be used in fences in which the posts or supports are of other material than stone.

THE usual thickness of veneers for furniture is from one-eighth to one-fortieth of an inch, but as a curiosity they are cut as thin as 160 to an inch.









Rose's Mechanical Works

MODERN STEAM ENGINES. An elementary treatise upon the Steam Engine, written in plain language, for use in the workshop as well as in the drawing office...

Mechanical Drawing Self-Taught, Comprising Instructions in the Selection and Preparation of Drawing Instruments. Elementary Instruction in Practical Mechanical Drawing...

Henry Carey Baird & Co., Industrial Publishers, Booksellers & Importers. 810 Walnut St., Philadelphia, Pa., U. S. A.

The Paris Exposition--Illustrated.

The SCIENTIFIC AMERICAN SUPPLEMENT will for some months to come contain illustrations of the buildings and the most interesting objects to be seen at the great French Exposition opened at Paris a few days ago...

Barrel, Keg, Hogshead, and Stave Machinery. Over 50 varieties manufactured by E. & B. Holmes, Buffalo, N. Y.

New York Belting and Packing Co.

John H. Cheever, Treas. 15 Park Row, New York. OLDEST and LARGEST Manufacturers in the United States of Vulcanized Rubber Fabrics For Mechanical Purposes. RUBBER BELTING, Packing, Hose,

Vulcanite Emery Wheels, Rubber Mats, Matting & Treads. SALESROOMS: Philadelphia, 308 Chestnut St.; Boston, 52 Summer St.; Chicago, 151 Lake St.; Minneapolis, 28 South 2d St.; Cincinnati, 161-165 W. Pearl St.; Cleveland, 176 Superior St.; San Francisco, 14 & 16 Main St.; Detroit, 16-24 Woodward Avenue. European Branch, Pickhuben 5 Hamburg (Freihafengebiet), Germany.

WELL TOOLS. THE LARGEST LINE OF WELLBORING TOOLS IN THE WORLD. NEW ERA Railroad Builder, Wagon Road Grader, Wagon Loader, and Ditching Machine.

OIL WELL SUPPLY CO. Ltd.

91 & 92 WATER STREET, Pittsburgh, Pa. Manufacturers of everything needed for ARTESIAN WELLS for either Gas, Oil, Water, or Mineral Tests, Boilers, Engines, Pipe, Cordage, Drilling Tools, etc.

THE BOOKWALTER STEEL AND IRON CO. Is now prepared to grant licenses under the Bookwalter, Robert, and other patents owned by it. Parties desiring licenses to operate under these patents will please state, in their application, for what purpose they design using the process...

PAINT YOUR ROOFS

With Dixon's Silica-Graphite Paint. It will cover two or three times more surface and last four or five times longer than any other paint. Not affected by heat or cold or acids. Send for circular.

AMATEUR PHOTOGRAPHY. EVEN THE BROWNIES MAKE PHOTOGRAPHS. WE MAKE ALL KINDS OF PHOTOGRAPHIC OUTFITS FOR AMATEURS. Send for our New Illustrated Catalogue and copy of Modern Photography.

ROCHESTER OPTICAL CO., 18 AQUEDUCT ST., ROCHESTER, N. Y. DRY AIR REFRIGERATING MACHINE. Description of Hall's improved horizontal dry air refrigerator designed to deliver about 10,000 cubic feet of cold air per hour...

Proposals for Installing an Electric Lighting Plant at the Navy Yard, Washington, D. C. BUREAU OF YARDS AND DOCKS, Navy Department, July 9, 1889.

United States Engineer Office, Savannah, Ga., July 13, 1889. Sealed proposals, in triplicate, will be received at this office until 12 o'clock M., city time, on the 15th day of August, 1889, for removing, repairing, and constructing Wing Dams and Shore Protection in the Savannah River, below Augusta, Ga.

Proposals for Construction of Abutment of Dam No. 1, Cumberland River--ENGINEER OFFICE, U. S. ARMY, Nashville, Tenn., July 5, 1889. Sealed proposals, in triplicate, will be received at this office until 11 A. M., Tuesday, August 6, 1889, for Building Cofferdam, Excavating for Foundation, and Construction of Stone Abutment at Dam No. 1, Cumberland River, near Nashville, Tennessee.

ARCHITECTURAL BOOKS. Useful, Beautiful, and Cheap.

To any person about to erect a dwelling house or stable, either in the country or city, or any builder wishing to examine the latest and best plans for a church, school house, club house, or any other public building of high or low cost, should procure a complete set of the ARCHITECTS' AND BUILDERS' EDITION OF THE SCIENTIFIC AMERICAN. The information these volumes contain renders the work almost indispensable to the architect and builder...

The CUSHMAN Patent 3 Pinion Geared Scroll Chucks with their latest improvements are unexcelled. Made in all sizes from 2 1/2 inch to 12 inch diameter, and are sold by the trade all over the world. Manufactured by The Cushman Chuck Co., Hartford, Conn.

WORKING MODELS & LIGHT MACHINERY. INVENTIONS DEVELOPED. Send for Model Circular. Jones Bros. E. Co., Cin'ti. O.

RENSSELAER POLYTECHNIC INSTITUTE, Troy, N. Y. The oldest School of Engineering in the United States. Next term begins Sept. 18. The Register for 1889 contains list of graduates for 64 years, with their positions; also course of study, requirements for admission, expenses, etc.

MUNSON'S PORTABLE MILLS, AND MILL FURNISHINGS, AND MILL FURNISHINGS, MANUFACTURED BY MUNSON BROTHERS, UTICA, N. Y., U. S. A.

VOLNEY W. MASON & CO., FRICTION PULLEYS CLUTCHES and ELEVATORS PROVIDENCE, R. I.

ADVICE TO YOUNG MECHANICAL ENGINEERS. Address by Prof. Perry, to his students at the Finsbury Technical College. A paper of great value and interest to all working engineers.

WATER MOTORS. The most efficient and economical means of obtaining from one-eighth to fifteen horse power and upward. A motor which does the greatest amount of work with the use of the smallest stream of water, specially adapted for running cheaply and efficiently, Printing Presses, Elevators, Church Organs, Coffee Mills, Sewing Machines, Lathes, Dental Contrivances, and in fact, any piece of Mechanism.

PERFECT NEWSPAPER FILE. The Koch Patent File, for preserving newspapers, Magazines, and pamphlets, has been recently improved and price reduced. Subscribers to the SCIENTIFIC AMERICAN and SCIENTIFIC AMERICAN SUPPLEMENT can be supplied for the low price of \$1.50 by mail, or \$1.25 at the office of this paper.

CURE for the DEAF. By FRENCH'S PATENT IMPROVED OPERATORS, EAR DRUGS. Whose name is known distinctly. Comfortable, invariable. Illustrated book & proof, FREE. Address or call on F. HISSOX, 853 Broadway, N. Y.

THE PENNA. DIAMOND DRILL & MFG. CO. THIRDSBORO, PA., Builders of High Class Steam Engines, Diamond Drilling and General Machinery. Flour Mill Rolls Ground and Grooved.

COMPLETE STEAM PUMP ONLY SEVEN DOLLARS. DEMAND THE PUMP OF YOUR DEALER OR WRITE TO US FOR PRICES. VAN DUZEN'S PATENT VAN DUZEN & TIFT SOLE MAKERS CINCINNATI, O.

HYDRAULIC ELEVATOR AT LES Fontinettes. Description of a hydraulic elevator recently built at Les Fontinettes, France, for lifting canal boats between reaches lying in different planes.

BIBB'S Celebrated Original BALTIMORE FIRE-PLACE HEATERS. To warm upper and lower rooms The Handsomest and Most Economical Coal Stoves in the World. B. C. BIBB & SON, Store, Foundry, Baltimore, Md. MARBLEZED SLATE TABLES New and Beautiful Designs.

75.00 to 250.00 A MONTH can be made working for us. Agents preferred who can furnish a horse and give their whole time to the business. Spare moments may be profitably employed also. A few vacancies in lowland cities B. F. JOHNSON & CO., 1009 Main St., Richmond, Va. N.B.--Please state age and business experience. Never mind about sending stamp for reply. B. F. J. & CO.

SALMON FISHERIES OF THE Columbia River. Abstract of a report made to the Secretary of War by Major W. A. Jones, U.S.A. Description of the various kinds of Salmon that are found in the river, methods of taking the fish, methods of marketing. Statistics, with 11 engravings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, Nos. 677 and 678. Price 10 cents. To be had at this office and from all newdealers.

AGENTS \$75 per month and expenses paid any active man or woman to sell our goods by sample and live at home. Salary paid promptly and expenses in advance. Full particulars and sample case FREE. We mean just what we say. Address Standard Silverware Co., Boston, Mass.

MANGANESE STEEL AND ITS PROPERTIES. Abstract of two papers on this subject by Mr. Robert A. Hadfield, Assoc. M. Inst. C.E. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 640. Price 10 cents. To be had at this office and from all newdealers.

ROCK BREAKERS AND ORE CRUSHERS. We manufacture and supply at short notice and lowest rates, Stone and Ore Crushers, containing the invention described in Letters Patent issued to Bill W. Blake, June 15, 1886, together with NEW AND VALUABLE IMPROVEMENTS, for which Letters Patent were granted May 11th and July 30th, 1889, to Mr. S. L. Marsden. All Crushers supplied by us are constructed under the superintendence of Mr. Marsden, who, for the past twenty years, has been connected with the manufacture of Blake Crushers in this country and England. FARRER FOUNDRY AND MACHINE CO., Manufacturers, ANSONIA, CONN. COPELAND & BACON, Agents, NEW YORK AND PHILADELPHIA.

Shepard's New \$60 Screw-Cutting Foot Lathe. Foot and Power Lathes, Drill Presses, Scroll Saw Attachments, Chucks, Mandrels, Twist Drills, Dogs, Calipers, etc. Lathes on trial. Lathes on payment. Send for catalogue of Outfits for Amateurs or Artisans. Address H. L. SHEPARD, AGENT, 134 East 2d Street, Cincinnati, Ohio.

IRON ORES OF THE UNITED STATES. A paper by John Birkinbine, giving an exhaustive account of all the iron ores of the United States, describing their characteristics and mode of occurrence, and showing their economic importance. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 666. Price 10 cents. To be had at this office and from all newdealers.

Barnes' Patent Foot Power Machinery. WORKERS OF WOOD OR METAL, without steam power, by using outfits of these Machines, can bid lower and save money from their jobs, than by any other means for doing their work. Also for Industrial Schools or Home Training. With them boys can acquire practical journeyman's trades before they "go for themselves." Price-List Catalogue Free. W. F. & JOHN BARNES CO., No. 1999...Baby St., Rockford, Ill.

SUPERFICIAL TENSION. A PAPER by M. Van der Mensbrugghe, explaining the action of the surface tension of liquids upon floating bodies, by a few simple experiments, and the action of oil upon waves. With 5 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 662. Price 10 cents. To be had at this office and from all newdealers.

KEEP COOL! CLARK'S Light-Running Ventilating FANS. Adapted for Ventilating and Drying of every description. Catalogue free. GEO. P. CLARK, Box 1, Windsor Locks, Conn.

WAR SHIPS OF THE FUTURE. AN elaborate discussion of the features that are possibly to characterize the war ship of the future. With 8 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 670. Price 10 cents. To be had at this office and from all newdealers.

A NEW CATALOGUE OF VALUABLE PAPERS. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, sent free of charge to any address. MUNN & CO., 361 Broadway, New York.

The MOTOR of 19th CENTURY. Can be used Any Place, to do Any Work, and by Any One. No Boiler! No Fire! No Steam! No Ashes! No Gauges! No Engineer! A perfectly safe Motor for all places and purposes. Cost of operation about one cent an hour to each indicated horse power. For circulars, etc., address Charter Gas Engine Co. Economy, Reliability, Simplicity, Safety. P. O. Box 148, Sterling, Ill.

THE MICRO-ORGANISMS OF AIR and Water. By Percy F. Frankland. An account of a series of observations made to trace the seasonal variations in the number of micro-organisms in the air and water. With 3 figures of apparatus. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 663. Price 10 cents. To be had at this office and from all newdealers.

TIGHT & SLACK BARREL MACHINERY. A SPECIALTY OF JOHN GREENWOOD & CO. ROCHESTER N.Y.

ELECTRICAL ENGINEERS. Send to American Watch Tool Co., Waltham, Mass., for circular of No. 3 Bench Lathe. A Screw Cutting Lathe 32 in. by 7 in. swing.

NOTES ON TECHNICAL EDUCATION. A paper by Dr. R. H. Thurston, in which the author discusses the reason and purpose of technical education, and its value in the development of the powers of the masses of the people, and the securing of the greatest possible prosperity of the nation. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 668. Price 10 cents. To be had at this office and from all newdealers.

CARY & MOEN CO. WIRE OF EVERY DESCRIPTION & STEEL SPRINGS. NEW YORK CITY. W. 23 ST.

The Scientific American PUBLICATIONS FOR 1889.

Table listing subscription rates for Scientific American publications in 1889, including weekly, monthly, and combined rates for the main publication and its supplement.

Advertisements.

Inside Page, each insertion --- 75 cents a line. Back Page, each insertion --- \$1.00 a line.

PENBERTHY IMPROVED AUTOMATIC INJECTOR. Why 20,000 have been sold in two years. Because they cost less than others and do equal work.

THE EIFFEL TOWER.—AN EXCELLENT engraving of the Eiffel one thousand-foot-high tower, which was opened to the public a few days ago.

RISE CYCLES! VICTORS ARE BEST! Bicycles, Tricycles, and Safeties. Send for free illustrated Catalogue.

THE COPYING PAD.—HOW TO MAKE and how to use; with an engraving. Practical directions how to prepare the gelatine pad, and also the aniline ink by which the copies are made.

THE KODAK CAMERA. Makes 100 Instantaneous Pictures by simply pressing a button. Anybody can use it who can wind a watch.

The Eastman Dry Plate & Film Co. Rochester, N. Y. 115 Oxford St., London. Send for copy of Kodak Primer with Kodak Photograph.

SUMMER COOKING. For Home, Cottage, Camp, or Yacht reduced to simplicity by use of The Arnold Automatic Steam Cooker.

INVENTORS and others desiring new articles manufactured and introduced, address P. O. Box 86, Cleveland, O.

Hard Rubber Pump Valves. For Hot Water, Oils, and Acids, also for very high pressures.

THE ARMSTRONG MFG. CO. BRIDGEPORT, CONN. WATER, GAS AND STEAM FITTERS' TOOLS.



Stocks and Dies for Pipe, Bolts, and Brass Pipe, Wrenches, Pipe Vises, Pipe Cutters, etc. Catalogues sent free on application.

JUST OUT! ALUMINUM-STEEL HACK SAW. Frame and 1 doz. blades, \$2; Blades per doz., 8-inch, \$1, by mail upon receipt of price.

MALLEABLE AND FINE GRAY IRON ALSO STEEL. THOMAS DEVLIN & CO. PATENTERS.

PATENTS.

MESSRS. MUNN & CO., in connection with the publication of the SCIENTIFIC AMERICAN, continue to examine improvements, and to act as Solicitors of Patents for Inventors.

THE BRIDGEPORT WOOD FINISHING CO. G. M. BREINIG AGENT. NEW MILFORD, CONN. WHEELERS PATENT WOOD MILLER. BREINIG'S LITHOGEN SILICATE PAINT.

THE ONLY PRACTICAL Low-Priced Typewriter. First-Class, Rapid, Durable, Business WORLD TYPEWRITER, 44 characters, \$10; 77 characters, \$15.

THOMPSON IMPROVED INDICATOR. Manufactured solely by American Steam Gauge Co. 2,000 IN USE.

POP SAFETY VALVES, STEAM PRESSURE GAUGES, ETC. 34 Chardon Street, Boston, Mass.

Steam! Steam! Quality Higher, Price Lower. For Strictly Cash, Complete Fixtures except Stock. 2-Horse Eureka Boiler and Engine, - \$135

VULCABESTON. Composed of Asbestos, combined with water and acid-proof materials, compressed and vulcanized FOR ELECTRICAL PURPOSES.

ANNOUNCEMENT! Improved methods and special tools make it possible for us to manufacture Elevators, to be operated from line of shafting, at a largely reduced cost.

WATCH CLEANING AND REPAIRING.—A valuable and practical paper, full of useful suggestions. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 664.

COPPER TUBES SHEET BRASS BRASS WIRE. THE AMERICAN BELL TELEPHONE CO. 95 MILK ST., BOSTON, MASS.

This Company owns the Letters Patent granted to Alexander Graham Bell, March 7th, 1876, No. 174,465, and January 30th, 1877, No. 186,787.

The transmission of Speech by all known forms of Electric Speaking Telephones infringes the right secured to this Company by the above patents, and renders each individual user of telephones not furnished by it or its licensees responsible for such unlawful use.

ASBESTOS PIPE COVERINGS. Made entirely of ASBESTOS. Absolutely Fire Proof. BRIDGED PACKING, MILL BOARD, SHEATHING, CEMENT, FIBRE AND SPECIALTIES.

CUTLER DESK. BEST IN THE WORLD. A CUTLER & SON, BUFFALO, N. Y.

THE PHONOGRAPH.—A DETAILED description of the new and improved form of the phonograph just brought out by Edison.

HARTFORD STEAM BOILER. HARTFORD INSPECTION AND INSURANCE CO. CONN.

BARBLESS HOOKS. All sizes, No. 1 to 10. Made of music wire. No spitting out. No trouble landing every bite.

The Caligraph. LIFESHORT WRITE THE WAY. Address: The American Writing Machine Co., Hartford, Conn.; New York Office, 237 Broadway.

SYRACUSE MALLEABLE IRON WORKS

WORKING MODELS and Experimental Machinery, metal or wood, made to order by MASON & BAUCE, successors to J. F. Werner, 62 Centre Street, New York.

PATENT JACKET KETTLES. Plain or Porcelain Lined. Tested to 100 lb. pressure. Send for Lists. HAND, BURR & CO., 614 and 616 Market St., Philadelphia, Pa.

Scientific Book Catalogue

RECENTLY PUBLISHED. Our new catalogue containing over 100 pages, including works on more than fifty different subjects. Will be mailed free to any address on application.

Novelty HOT AIR Furnaces. Expose an Immense Heated Surface. Extract all the Heat from the Gases. Furnish Pure Warm Air in abundance.

KEY SEATING. Machines and 20" Drills. W. P. DAVIS, Rochester, N. Y.

THE Scientific American

ESTABLISHED 1846. The Most Popular Scientific Paper in the World. Only \$3.00 a Year, including Postage. Weekly. 52 Numbers a Year.

This widely circulated and splendidly illustrated paper is published weekly. Every number contains sixteen pages of useful information and a large number of original engravings of new inventions and discoveries.

The safest way to remit is by Postal Order, Draft, or Express Money Order. Money carefully placed inside of envelopes, securely sealed, and correctly addressed, seldom goes astray, but is at the sender's risk.

MUNN & CO., 361 Broadway, New York.

THE Scientific American Supplement.

This is a separate and distinct publication from THE SCIENTIFIC AMERICAN, but is uniform therewith in size, every number containing sixteen large pages full of engravings, many of which are taken from foreign papers, and accompanied with translated descriptions.

The most important Engineering Works, Mechanisms, and Manufactures at home and abroad are illustrated and described in the SUPPLEMENT.

Price for the SUPPLEMENT for the United States and Canada, \$5.00 a year, or one copy of the SCIENTIFIC AMERICAN and one copy of the SUPPLEMENT, both mailed for one year for \$7.00.

MUNN & CO., 361 Broadway, N. Y., Publishers SCIENTIFIC AMERICAN.

Building Edition.

THE SCIENTIFIC AMERICAN ARCHITECTS' AND BUILDERS' EDITION is issued monthly. \$2.50 a year. Single copies, 25 cents. Forty large quarto pages, equal to about two hundred ordinary book pages.

A special feature is the presentation in each number of a variety of the latest and best plans for private residences, city and country, including those of very moderate cost as well as the more expensive.

MUNN & CO., Publishers, 361 Broadway, New York

PRINTING INKS

THE "Scientific American" is printed with CHASE & JOHNSON & CO.'S INK. Tenth and Long bard Sts., Phila., and 47 Rose St., opp. Duane St., N. Y.